
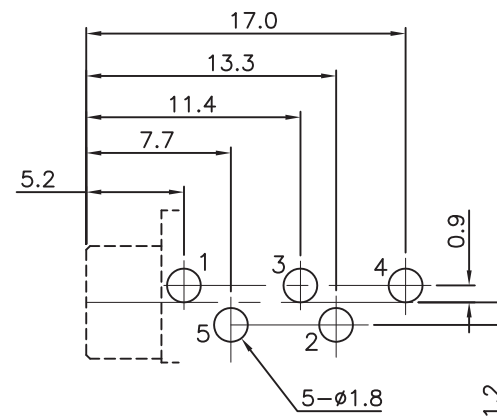
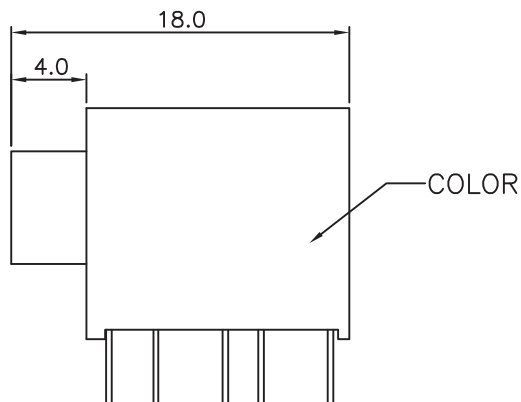


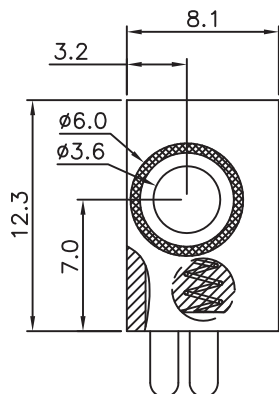

P.C.B. LAYOUT
(BOTTOM VIEW)

SCHEMATIC						
Light Blue Pantone #284C	S800 - 1110 - 101	S800 - 1120 - 101	S800 - 1130 - 101	S800 - 1140 - 101	S800 - 1150 - 101	S800 - 1160 - 101
Lime Pantone #577C	S800 - 1110 - 102	S800 - 1120 - 102	S800 - 1130 - 102	S800 - 1140 - 102	S800 - 1150 - 102	S800 - 1160 - 102
Pink Pantone #701C	S800 - 1110 - 103	S800 - 1120 - 103	S800 - 1130 - 103	S800 - 1140 - 103	S800 - 1150 - 103	S800 - 1160 - 103
Black	S800 - 1110 - 100	S800 - 1120 - 100	S800 - 1130 - 100	S800 - 1140 - 100	S800 - 1150 - 100	S800 - 1160 - 100

ELECTRICAL:

CURRENT: 0.5A

CONTACT RESISTANCE: < 50m ?

INSULATOR RESISTANCE: > 100M ?

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

INSULATOR HIGH TEMPERATURE: NYLON 66 + 30% FG, UL94V-0

BUSHING: Nickel Plated Brass

CONTACT SPRINGS: Phosphor Bronze

SHUNT TERMINALS: Tin Plated Brass

GROUND TERMINALS: Tin Plated Brass

HOW TO ORDER:

S	8	0	0	-	1	1	X	0	-	0	0	X	-	Z
TYPE NUMBER							SCHEMATIC NUMBER:			COLOR OPTION				
11							SEE SCHEMATIC			0 - BLACK				
							NUMBER ABOVE			1 - LIGHT BLUE PC				
										2 - LIME PC #577C				
										3 - PINK PT #701C				

RoHS
COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	S.E.	S.M.	S.M.	06/09/98		
A	Updated	D.H.	S.M.	S.M.	05/14/04		
B	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08	Stereo Jack 3.5mm, 12.3mm Height, 8.1mm width,	
						All Plastic Bushing w/ Inner Metal Ring; Pantone Colors and Black	
TOL. DEC. X. +/- 0.5 X.X +/- 0.3 X.XX +/- 0.15 ANGLE +/- 3° UNIT: mm						SERIES: S 8 0 0 - 1 1 X 0 - 0 0 X - Z	
						Pg: 1	