
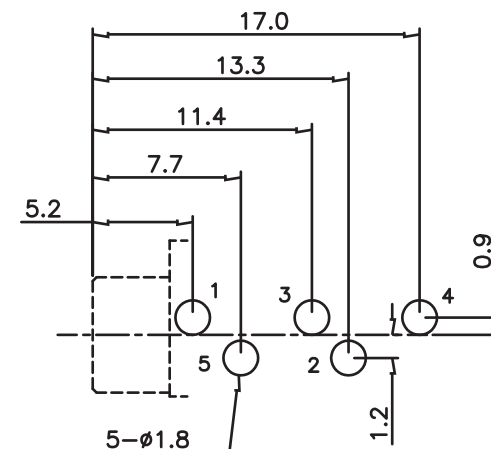
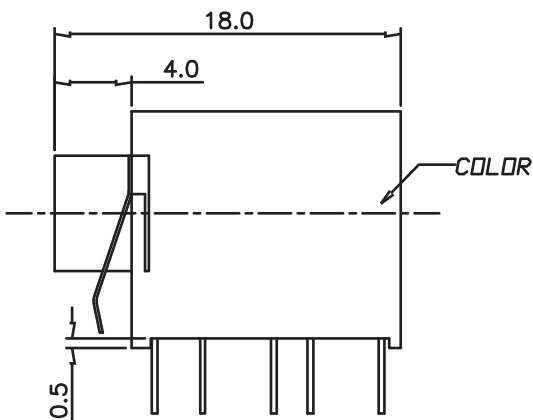


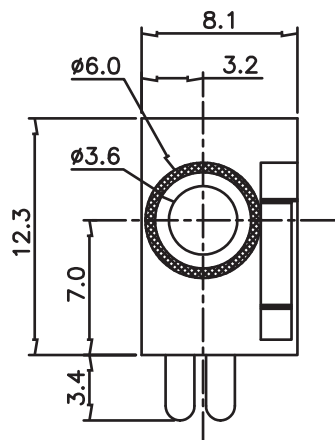

P.C.B. LAYOUT
(BOTTOM VIEW)

SCHEMATIC						
LIGHT BLUE PANTONE# 284C COLOR	S800 - 1110 - 421	S800 - 1120 - 421	S800 - 1130 - 421	S800 - 1140 - 421	S800 - 1150 - 421	S800 - 1160 - 421
LIME PANTONE# 577C COLOR	S800 - 1110 - 422	S800 - 1120 - 422	S800 - 1130 - 422	S800 - 1140 - 422	S800 - 1150 - 422	S800 - 1160 - 422
PINK PANTONE# 701C COLOR	S800 - 1110 - 423	S800 - 1120 - 423	S800 - 1130 - 423	S800 - 1140 - 423	S800 - 1150 - 423	S800 - 1160 - 423
BLACK COLOR	S800 - 1110 - 420	S800 - 1120 - 420	S800 - 1130 - 420	S800 - 1140 - 420	S800 - 1150 - 420	S800 - 1160 - 420

ELECTRICAL:

CURRENT: 0.5A

CONTACT RESISTANCE: < 50m ?

INSULATOR RESISTANCE: > 100M ?

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0

INSULATOR HIGH TEMPERATURE: NYLON 66 + 30% FG, UL94V-0

BUSHING: NICKEL PLATED BRASS

CONTACT SPRINGS: PHOSPHOR BRONZE

SHUNT TERMINALS: TIN PLATED BRASS

GROUND TERMINALS: TIN PLATED BRASS

HOW TO ORDER:

S	8	0	0	-	1	1	X	0	-	4	2	X	-	Z	RoHS COMPLIANT
<u>TYPE NUMBER</u> 11							<u>SCHEMATIC NUMBER:</u> See Schematic Number Above		<u>LEAD TYPE:</u> 0 - Straight		<u>BUSHING OPTION:</u> 2 - Non Threaded		<u>COLOR OPTION</u> 0 - BLACK 1 - LIGHT BLUE PC #284C 2 - LIME PC #577C 3 - PINK PT #701C		
<u>COVER TYPE:</u> 4 - Plastic with Front Panel Ground															

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	D.H.	S.M.	S.M.	04/13/04	
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08	
						Stereo Jack 3.5mm, 8.1mm width, 12.3mm Height, All Plastic Bushing w/ Inner Metal Ring, Front Panel Ground Spring, Pantone Colors and Black
TOL. DEC. .X +/- 0.5 .XX +/- 0.3 .XXX +/- 0.15 ANGLE +/- 3° UNIT: mm						SERIES: S 8 0 0 - 1 1 X 0 - 4 2 X - Z Pg: 1