


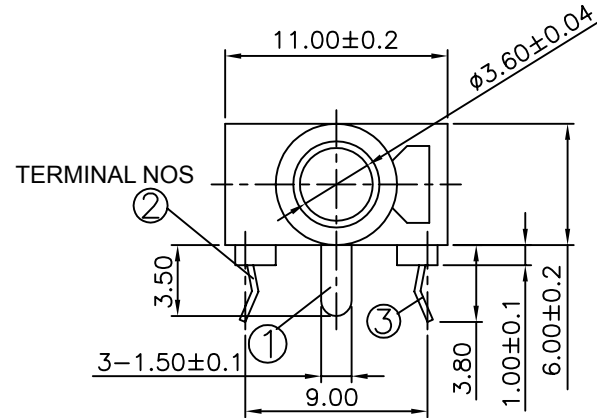

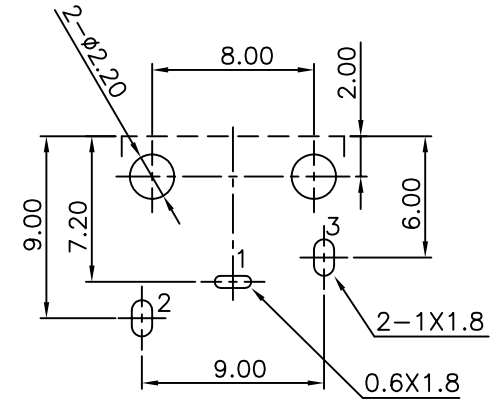


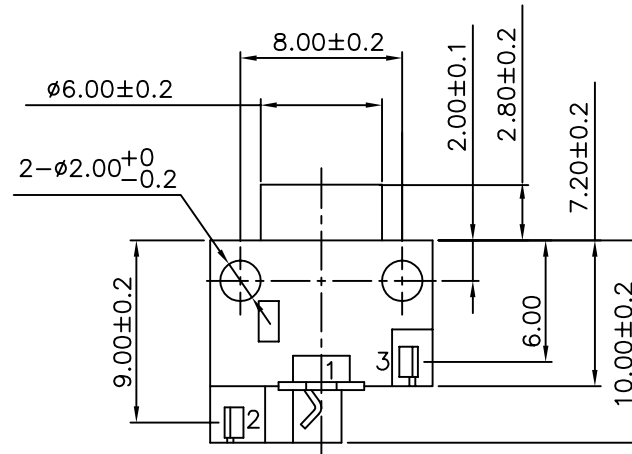

RECOMMENDED MATING PLUG

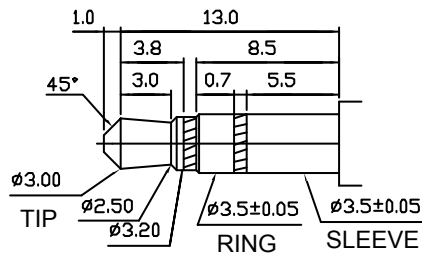

RECOMMENDED PCB LAYOUT (BOTTOM VIEW)



ELECTRICAL:

CURRENT: 0.5A
CONTACT RESISTANCE: < 50m
INSULATOR RESISTANCE: > 100M OHMS
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR NORMAL: PBT + 15% FG, UL94V-0
BUSHING INNER RING : NICKEL PLATED BRASS
CONTACT SPRINGS: SILVER PLATED COPPER ALLOY
SHUNT TERMINALS: SILVER PLATED COPPER ALLOY
GROUND TERMINALS: SILVER PLATED COPPER ALLOY

HOW TO ORDER:

S 8 0 0 - 1 2 1 1 - 0 0 0 - Z

TYPE NUMBER
13

SCHEMATIC NUMBER:
SEE SCHEMATIC
NUMBER ABOVE

**RoHS
COMPLIANT**

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	S.M.	6/9/98	
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08	
						Stereo Jack 3.5mm;
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-						P/N : S800-1211-000-Z
ANGLE +/- UNIT: mm						Pg: 1