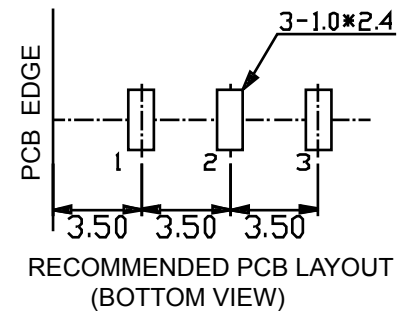
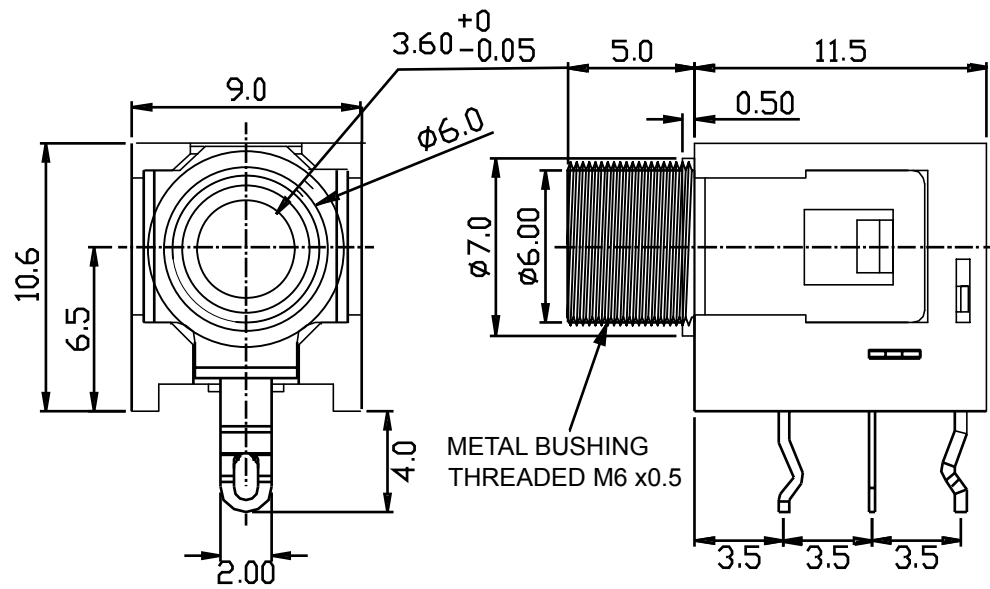


ELECTRICAL:

VOLTAGE AND CURRENT RATING : DC 12V/2 AMP; AC 100V/ 1A MAX:
 CONTACT RESISTANCE: < 30 milliohms
 INSULATOR RESISTANCE: > 100 Megaohms Min. @ 500 VDC
 DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR: PBT UL94V-0
 BUSHING: NICKEL PLATED BRASS
 CONTACT SPRINGS: PHOSPHOR BRONZE
 SHUNT TERMINALS: TIN PLATED BRASS
 GROUND TERMINALS: TIN PLATED BRASS

HOW TO ORDER:

S 8 0 0 - 1 8 1 1 - 0 1 0 - Z

TYPE NUMBER
18

SCHEMATIC NUMBER:
SEE SCHEMATIC
NUMBER ABOVE

RoHS COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	S.E.	S.M.	S.M.	6/9/98		
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08	Stereo Jack 3.5mm; 9.00 mm Width; 10.6 Mm Height, Thru Hole	
						With M6 x .05 Threaded Bushing	
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/-						P/N: S 8 0 0-1811-010-Z	
ANGLE +/- UNIT: mm						Pg: 1	