
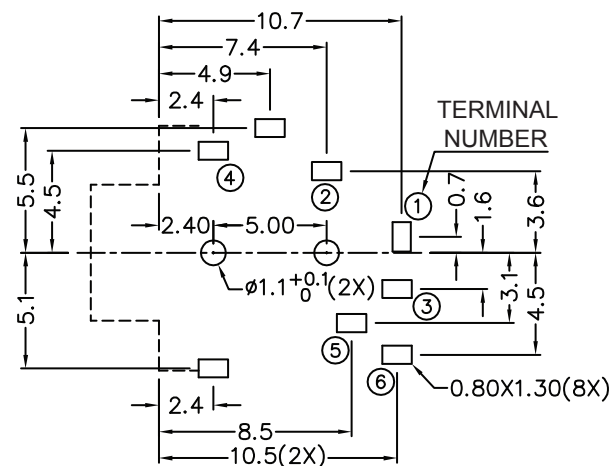
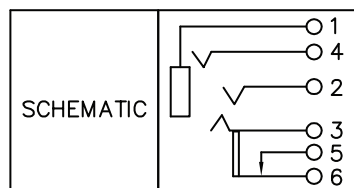
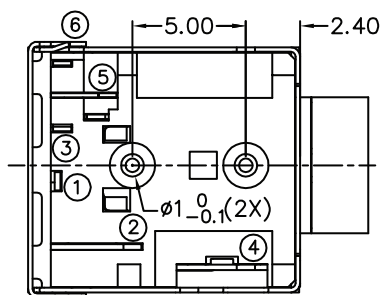
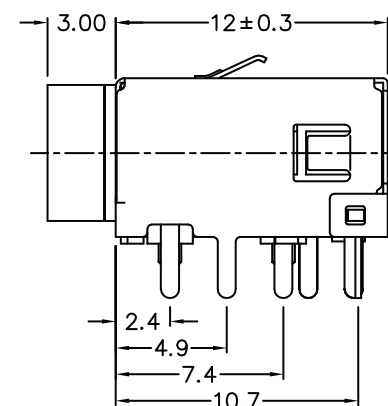
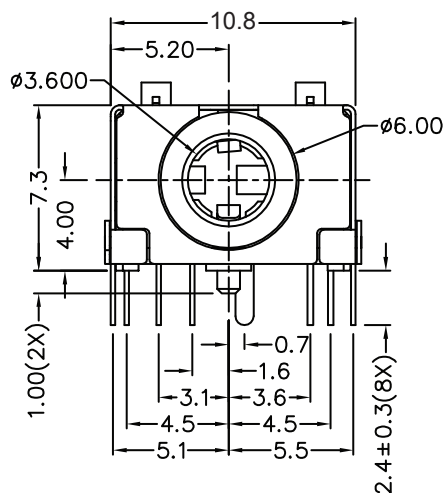


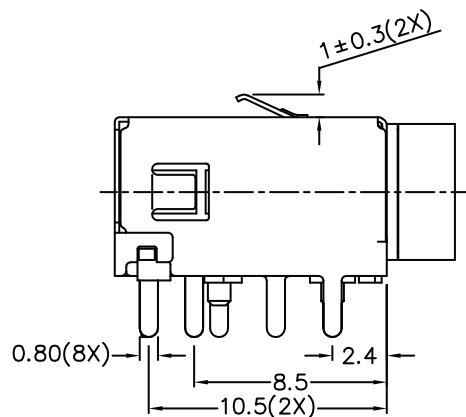

RECOMMENDED PCB LAYOUT

MECHANICAL:

DURABILITY :5000 Cycles

ELECTRICAL:

VOLTAGE /CURRENT: 12VDC / 1.0 A

CONTACT RESISTANCE: < 50 milliohms

INSULATOR RESISTANCE: 100 Megaohms @50VDC

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

MATERIAL:

INSULATOR :PA66 UL94V-0

CONTACTS: Copper Alloy ; Tin Plated

BUSHING -Brass /Nickel Plated

S 8 0 0 - 2 7 1 0 - 3 2 0 0 - Z

TYPE NUMBER

27

RoHS
COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	06/07/15	
						Audio Jack 3.5mm, Right Angle ; 7.2 mm Width ; 14.5 mm Length
						4.1 mm Height; Mid Mount; Thru Hole
TOL. DEC. .X +/- 0.2 .XX +/- 0.1 .XXX +/- 0.05 ANGLE +/- UNIT: mm						SERIES: S800-2710-3200-Z
						Pg: 1