

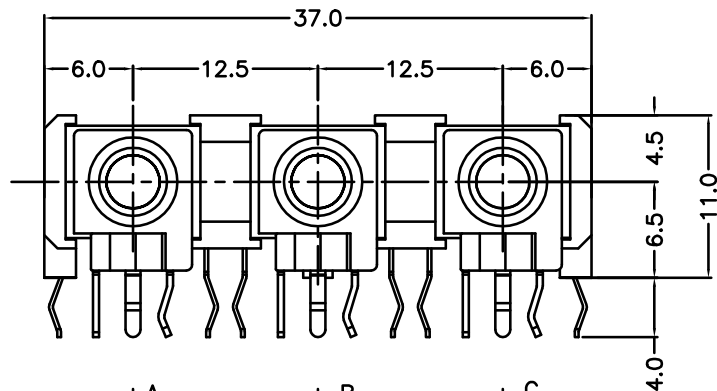


Bushing Colors


A - Lime Color 577C
B - Light Blue Color 284C
C - Pink Color 701C



SCHEMATIC NUMBER -1

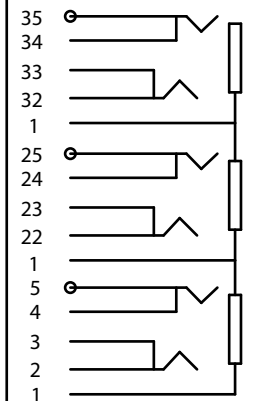

SCHEMATIC			
MODEL NO	S801 - 0111 - 325(A)	S801 - 0111 - 325(B)	S801 - 0111 - 325(C)

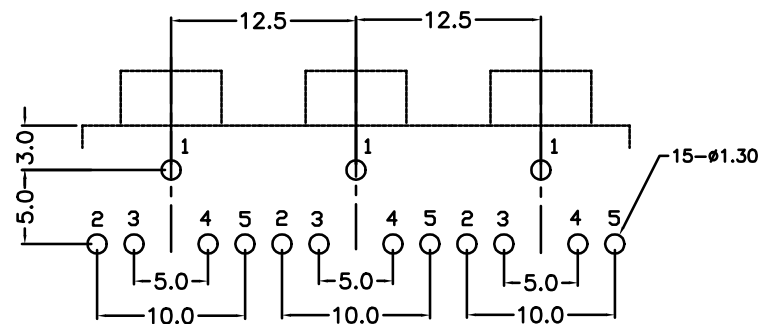

P.C.B. LAYOUT
(BOTTOM VIEW)

ELECTRICAL:

VOLTAGE: 16 VDC

CURRENT: 0.3A

CONTACT RESISTANCE: 100 milliohm (Max.)

INSULATOR RESISTANCE: > 100 Mega ohms

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MIN.

OPERATING TEMPERATURE: -25°C TO +85°C

MATERIAL:

INSULATOR: PBT; UL 94V-0

CONTACT: Copper Alloy; Au Plated

SHIELD: Brass; Tin Plated

HOUSING: PBT; UL 94V-0, Black

COVER: PBT; UL 94V-0, Black

HOW TO ORDER:

S 8 0 1 - 0 1 1 - 3 2 5 - Z

TYPE NUMBER: 01

SCHEMATIC NUMBER: See Schematic Number Above

LEAD TYPE: 1 - Kinked Tail

STACK: 3 - Three

BUSHING TYPE: 2 - Non Threaded

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	D.H.	S.M.	S.M.	03/22/04
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/23/08
					Stereo Jack, 3.5mm, Horizontal (3) Stack, Shielded, Kinked Tab, 11.0mm, Pantone Color (577C-284C-701C)
TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm					SERIES: S800 - 0111 - 325 - Z
					Pg: 1