
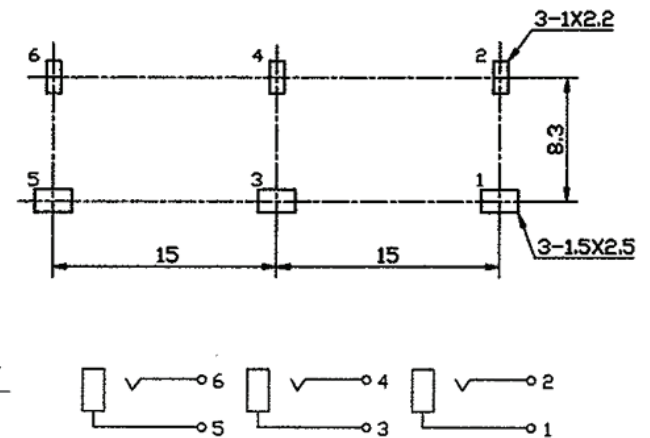
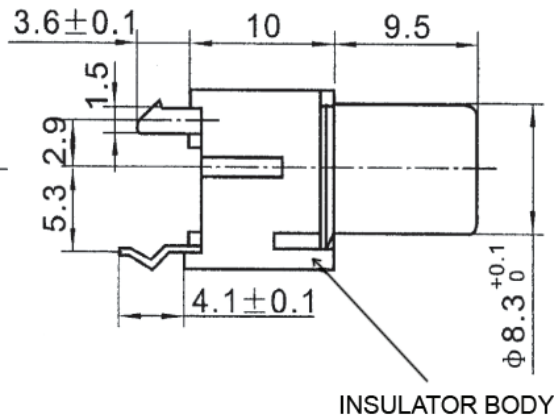


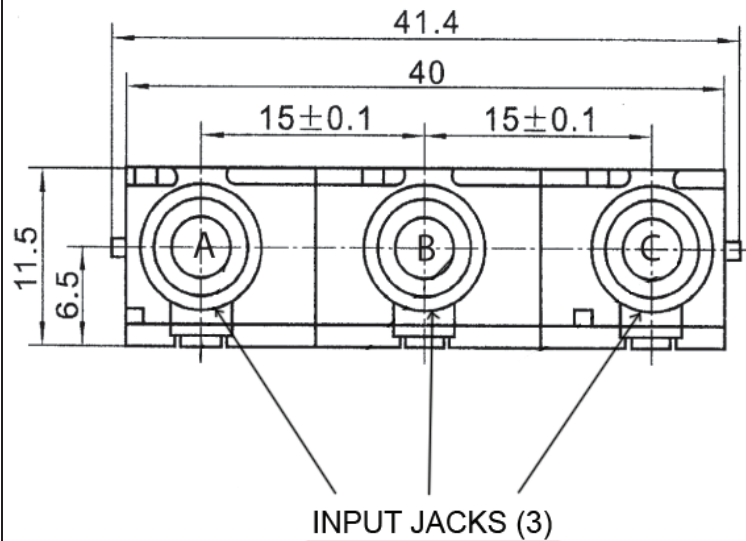

ELECTRICAL:

CURRENT RATING: 0.5A AC

CURRENT RATING: 1A DC

VOLTAGE RATING: 50V AC

VOLTAGE RATING: 5V DC

CONTACT RESISTANCE:

< 20 Milliohm

INSULATION RESISTANCE:

> 1000 Megaohm at DC 500V

DIELECTRIC WITHSTANDING VOLTAGE:

500V (rms) AC for 1 minute.

TEMPERATURE RANGE: -25° C to +70° C

MATERIAL:

INSULATOR: ABS PA-7770

CONTACT PLATING: Sn-Pb Plating

SCREW TERMINAL: Ni Plating

MECHANICAL:

INSERTION FORCE: 0.3kgf~4kgf

WITHDRAWAL FORCE: 0.3kgf~4kgf

INPUT JACK INSULATOR COLOR CHART

	A	B	C
code	pos A	pos B	pos C
1	Red	White	Yellow
2	Red	Green	Blue
3	Yellow	White	Red

HOW TO ORDER

S 9 2 1 - 1 3 0 0 - 0 X 0 - Z

ORIENTATION:

0 - RIGHT ANGLE

1 - STRAIGHT

MOUNTING OPTION:

0 - w/OUT SCREW MOUNTING HOLES

1 - w/ SCREW MOUNTING HOLES

SHIELDING OPTION:

0 - NON SHIELDED

1 - SHIELDED

GROUND SHELL PLATING:

0 - NICKEL

1 - GOLD

INPUT JACK INSULATOR COLOR:

SEE INSULATOR COLOR CHART

INSULATOR BODY COLOR

0 - WHITE

1 - BLACK

RoHS
COMPLIANT

Rev		Drawn	Checked	Approved	Date
0	Issued	A.M.	S.M.	S.M.	09/02/03
A	Revised For Color Code	A.M.	S.M.	S.M.	02/23/06
B	Revised for RoHS Compliance	B.S.	S.M.	S.M.	07/18/08
C	Added Insulator Body Color	B.S.	S.M.	S.M.	02/11/10

SMP TECHNOLOGY, INC.

RCA PIN JACK, 1x3, STRAIGHT, NON-SHIELDED

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- UNIT: mm

p/n: S921 - 1300 - 0X0 - Z

Pg: 1