

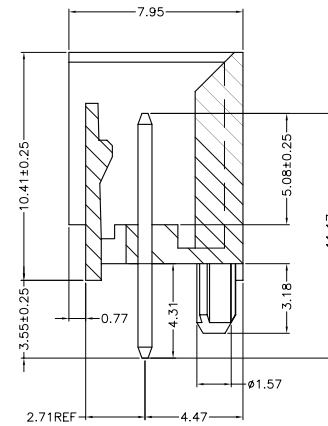


RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THK PRINTED CIRCUIT BOARD

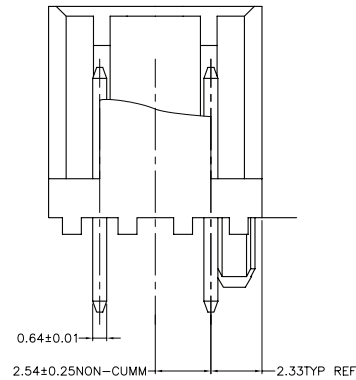

ELECTRICAL:

CURRENT RATING: 3A AC, DC
VOLTAGE RATING: 250V AC MAX.
OPERATING TEMPERATURE: -40 ° TO +85 °C
CONTACT RESISTANCE: 20 MILLIOHM MAX.
INSULATION RESISTANCE: 1000 MEGAOHM MIN.
VOLTAGE WITHSTANDING: 600V AC / MINUTE

MATERIAL:

CONTACT MATERIAL: COPPER ALLOY,
TIN OR GOLD PLATING OVER NICKEL
PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

HOW TO ORDER:

W 0 1 9 - 0 3 2 1 - 2 X 1 - Z

OF CONTACTS:
02THRU12

PIN REMOVAL OPTION:
2 - PIN #2 REMOVED

DEFINITION:
1-STRAIGHT
2-RIGHTANGLE

OPTION:
1 - PBT
2 - HIGH TEMP PLASTIC

**RoHS
COMPLIANT**

CONTACT PLATING
1-TIN PLATED
2-GOLDFLASH
3-10u" GOLD
5-30u" GOLD

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	WHS	S.M.	S.M.	4/21/06		
					HEADER; 2.54mm PITCH; 4 SIDES SHROUDED; MTA TYPE	
					3 PIN, PIN #2 REMOVED	
SCALE: N/A						
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	SERIES: W 0 1 9 - 0 3 2 1 - 2 X 1 - Z
						Pg: 1