

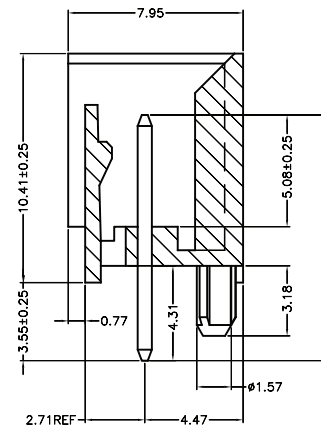


RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THK PRINTED CIRCUIT BOARD

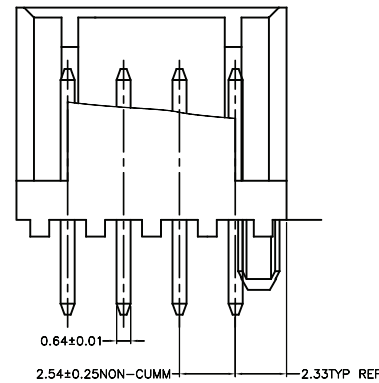

ELECTRICAL:

CURRENT RATING: 3A AC, DC
VOLTAGE RATING: 250V AC MAX.
OPERATING TEMPERATURE: -40 ° TO +85 °C
CONTACT RESISTANCE: 20 MILLIOHM MAX.
INSULATION RESISTANCE: 1000 MEGAOHM MIN.
VOLTAGE WITHSTANDING: 600V AC / MINUTE

MATERIAL:

CONTACT MATERIAL: COPPER ALLOY,
TIN OR GOLD PLATING OVER N
PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

HOW TO ORDER:

W 0 1 9 - 0 4 0 1 - 2 X 1 - Z

OF CONTACTS:
02 THRU 12

PIN REMOVAL OPTION:
0 - FULLY LOADED

DEFINITION:
1-STRAIGHT
2-RIGHTANGLE

OPTION:
1 - PBT
2 - HIGH TEMP PLASTIC

CONTACT PLATING
1-TIN PLATED
2-GOLDFLASH
3-10u" GOLD
5-30u" GOLD

RoHS
COMPLIANT

Rev	Drawn	Checked	Approved	Date
0	WHS	S.M.	S.M.	4/21/06

SCALE: N/A

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

SMP TECHNOLOGY, INC.
HEADER; 2.54mm PITCH; 4 SIDES SHROUDED; MTA TYPE
4 PIN; FULLY LOADED

SERIES: W 0 1 9 - 0 4 0 1 - 2 X 1 - Z