
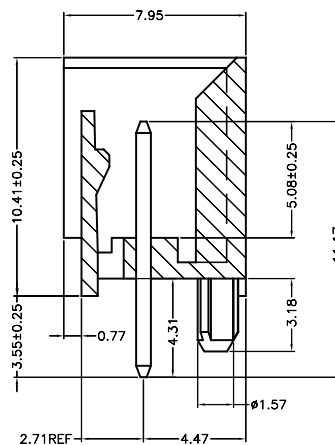



RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THK PRINTED CIRCUIT BOARD

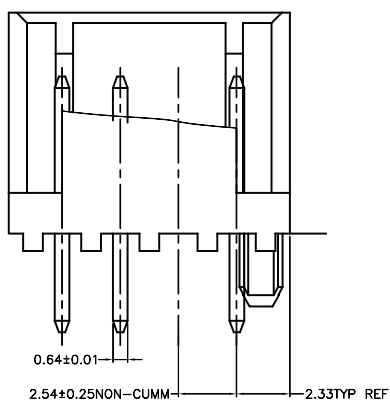

ELECTRICAL:

CURRENT RATING: 3A AC, DC
VOLTAGE RATING: 250V AC MAX.
OPERATING TEMPERATURE: -40 ° TO +85 °C
CONTACT RESISTANCE: 20 MILLIOHM MAX.
INSULATION RESISTANCE: 1000 MEGAOHM MIN.
VOLTAGE WITHSTANDING: 600V AC / MINUTE

MATERIAL:

CONTACT MATERIAL: COPPER ALLOY,
TIN OR GOLD PLATING OVER NICKEL
PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

HOW TO ORDER:

W	0	1	9	-	0	4	3	1	-	2	X	1	-	Z	
															RoHS COMPLIANT
															CONTACT PLATING
															1-TIN PLATED
															2-GOLD FLASH
															3-10u" GOLD
															5-30u" GOLD

OF CONTACTS:
02 THRU 12

PIN REMOVAL OPTION:
3 - PIN #3 REMOVED

DEFINITION:
1-STRAIGHT
2-RIGHT ANGLE

OPTION:
1 - PBT
2 - HIGH TEMP PLASTIC

Rev		Drawn	Checked	Approved	Date						
0	Issued	WHS	S.M.	S.M.	4/21/06	SMP TECHNOLOGY, INC.					
						HEADER; 2.54mm PITCH; 4 SIDES SHROUDED; MTA TYPE					
						4 PIN; PIN #3 REMOVED					
SCALE: N/A											
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	SERIES: W 0 1 9 - 0 4 3 1 - 2 X 1 - Z					Pg: 1