
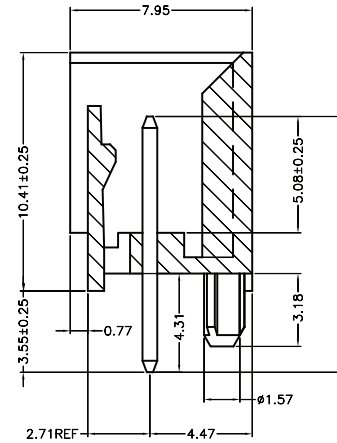
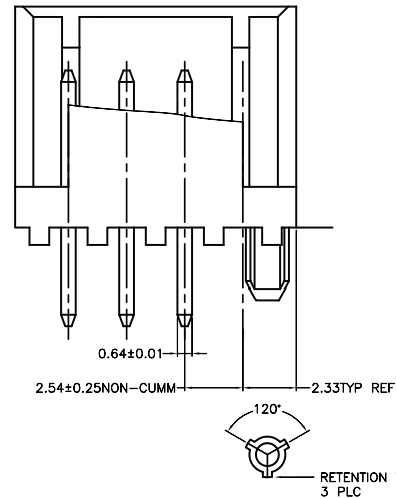



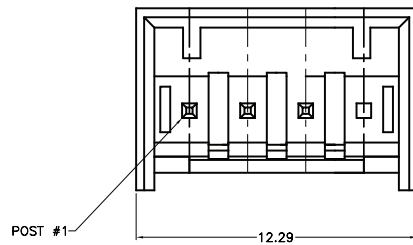

ELECTRICAL:

CURRENT RATING: 3A AC, DC
VOLTAGE RATING: 250V AC MAX.
OPERATING TEMPERATURE: -40 ° TO +85 °C
CONTACT RESISTANCE: 20 MILLIOHM MAX.
INSULATION RESISTANCE: 1000 MEGAOHM MIN.
VOLTAGE WITHSTANDING: 600V AC / MINUTE

MATERIAL:

CONTACT MATERIAL: COPPER ALLOY,
TIN OR GOLD PLATING OVER NICKEL
PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.

HOW TO ORDER:

W 0 1 9 - 0 4 4 1 - 2 X 1 - Z

OF CONTACTS:
02 THRU 12

PIN REMOVAL OPTION:
4 - PIN #4 REMOVED

DEFINITION:
1-STRAIGHT
2-RIGHTANGLE

OPTION:
1 - PBT
2 - HIGH TEMP PLASTIC

RoHS
COMPLIANT

CONTACT PLATING
1-TIN PLATED
2-GOLD FLASH
3-10u" GOLD
5-30u" GOLD

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	WHS	S.M.	S.M.	4/21/06		
						HEADER; 2.54mm PITCH; 4 SIDES SHROUDED; MTA TYPE	
						4 PIN; #4 PIN REMOVED	
SCALE: N/A						SERIES: W 0 1 9 - 0 4 4 1 - 2 X 1 - Z	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/-	ANGLE +/-	UNIT: mm	Pg: 1	