


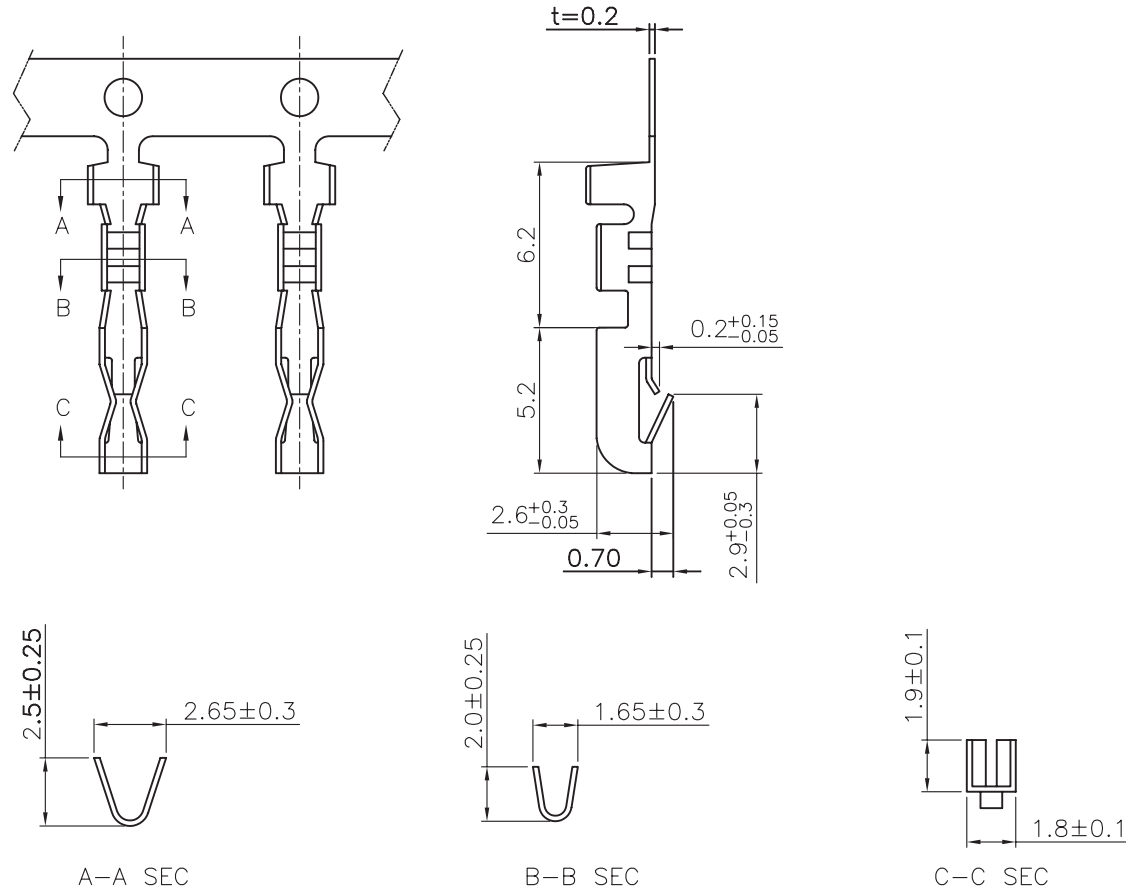

ELECTRICAL:

CURRENT RATING: 3A AC/DC
 VOLTAGE RATING: 250V AC/DC
 CONTACT RESISTANCE: 20 mΩ max.
 WITHSTANDING VOLTAGE: 1000 VAC for 1 min.
 INSULATION RESISTANCE: 1000 MΩ min.
 TEMPERATURE RANGE: -25°C to 85°C

MATERIAL:

CONTACT: Copper Alloy, Tin Plated
 BASE: Nylon 66 UL94V-0

HOW TO ORDER:

W 0 4 3 - 0 0 0 2 - 0 0 1 - Z

1 - TIN PLATED

**RoHS
COMPLIANT**

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	D.H.	S.M.	S.M.	03/12/04	
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	08/04/08	Contacts, Strip Form for (Housing P/N:W043-xx41-000)
TOL. DEC. .X +/- 0.2 .XX +/- 0.15 .XXX +/- 0.10 ANGLE +/- UNIT: mm						P/N:W043-0042-000-Z Pg: 1