

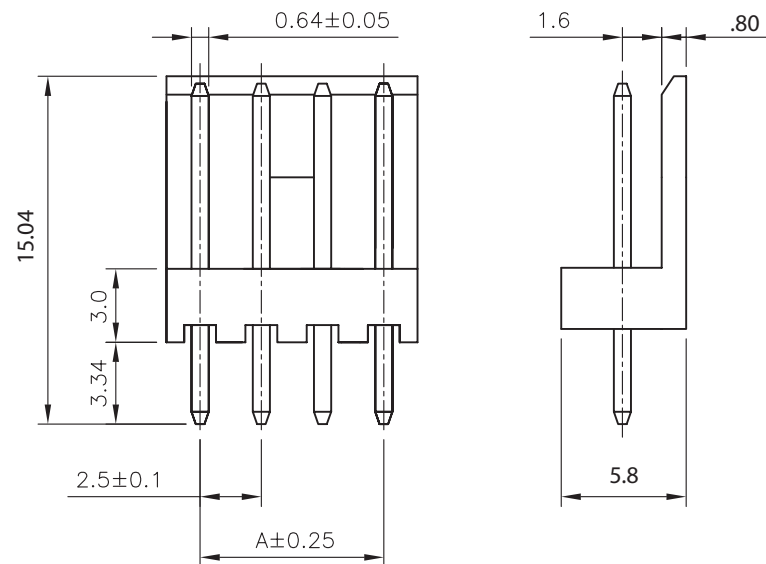


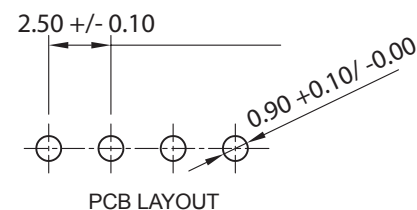

Poles	DIMENSION(mm)	
	A	B
2	2.50	5.10
3	5.00	7.60
4	7.50	10.10
5	10.00	12.70
6	12.50	15.20
7	15.00	17.70
8	17.50	22.30

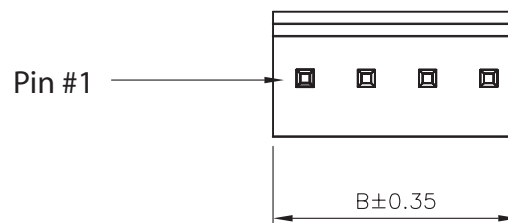

ELETRICAL:

CURRENT RATING: 3AAC/DC

VOLTAGE RATING: 250V AC/DC

CONTACT RESISTANCE: 20 mΩ max.

WITHSTANDING VOLTAGE: 1000 VAC for 1 min.

INSULATION RESISTANCE: 1000 MΩ min.

TEMPERATURE RANGE: -25°C to 85°C

MATERIAL:

CONTACT: Copper Alloy, Tin Plated

BASE: Nylon 66 UL94V-0

HOW TO ORDER:

W 0 4 3 - X X 1 0 0 0 0 - Z

OF POSITIONS:

02 - 08

HOUSING & TERMINATION TYPE:

1 - VERTICAL HEADER THRU HOLE

RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date
0	A.M.	S.M.	S.M.	01/10/02
A	A.M.	S.M.	S.M.	09/10/05

SMP TECHNOLOGY, INC.

2.5mm Pitch, Vertical Header, Disk Drive

TOL. DEC. .X +/- 0.2 .XX +/- 0.15 .XXX +/- 0.10 ANGLE +/- UNIT: mm

P/N:W043-XX10-000-Z

Pg: 1