

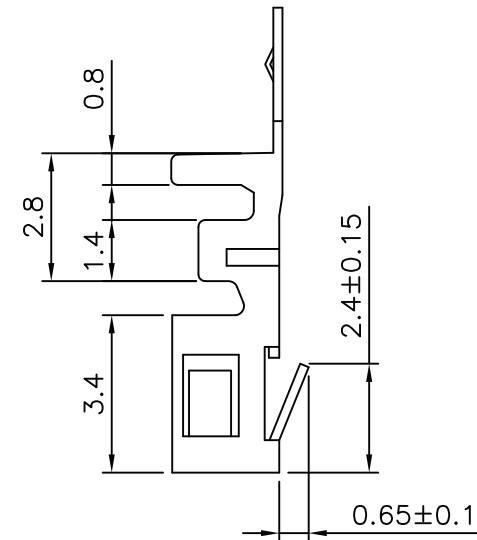
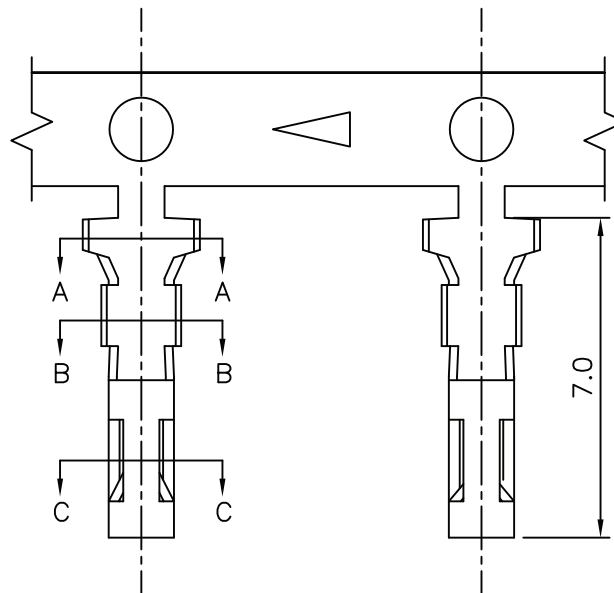


A-A SEC



B-B SEC

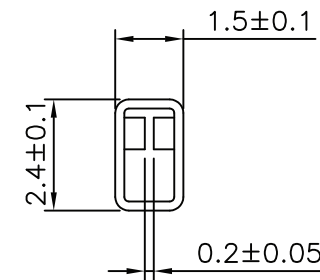

C-C SEC

ELETRICAL:

CURRENT RATING: 3A AC/DC
VOLTAGE RATING: 250V AC/DC
CONTACT RESISTANCE: 20 mΩ max.
WITHSTANDING VOLTAGE: 1000 VAC for 1 min.
INSULATION RESISTANCE: 1000 MΩ min.
TEMPERATURE RANGE: -25°C to 85°C

MATERIAL:

CONTACT: Copper Alloy, Tin Plated
BASE: Nylon 66 UL94V-0

HOW TO ORDER:

W 0 4 5 - 0 0 0 2 - 0 0 1 - Z

RoHS COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	4/19/07	
SCALE:n/a						Contacts, (For Use with Housing P/N: W045-0041-000-Z)
TOL. DEC.	X +/- 0.3	XX +/- 0.2	XXX +/- 0.1	ANGLE +/-	UNIT: mm	P/N:W045-0002-001-Z Pg: 1