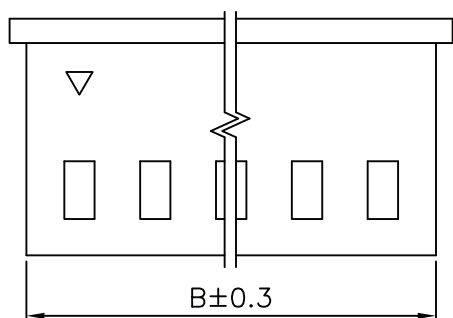
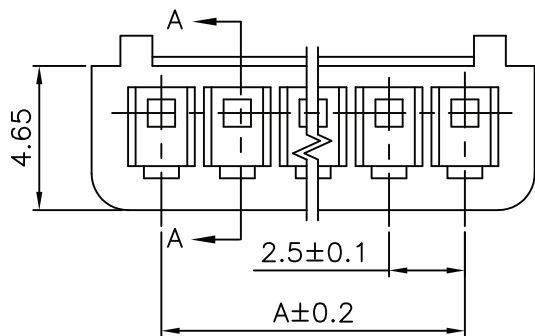


A-A SEC

# of Contacts	Dimensions(mm)	
	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50

ELETRICAL:

CURRENT RATING: 3A AC/DC
 VOLTAGE RATING: 250V AC/DC
 CONTACT RESISTANCE: 20 mΩ max.
 WITHSTANDING VOLTAGE: 1000 VAC for 1 min.
 INSULATION RESISTANCE: 1000 MΩ min.
 TEMPERATURE RANGE: -25°C to 85°C

MATERIAL:

CONTACT: Copper Alloy, Tin Plated
 BASE: Nylon 66 UL94V-0

HOW TO ORDER:

W 0 4 5 - X X 4 1 - 0 0 0 - Z

OF POSITIONS:

02 - 20

HOUSING & TERMINATION TYPE:

4 - Housing for Contacts

RoHS COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	4/19/07	
SCALE:n/a						Contact Housing (For Use with Contact P/N: W045-0002-001-Z)
TOL. DEC. .X +/- 0.3 .XX +/- 0.2 .XXX +/- 0.1 ANGLE +/- UNIT: mm						P/N:W045-XX41-000-Z Pg: 1