


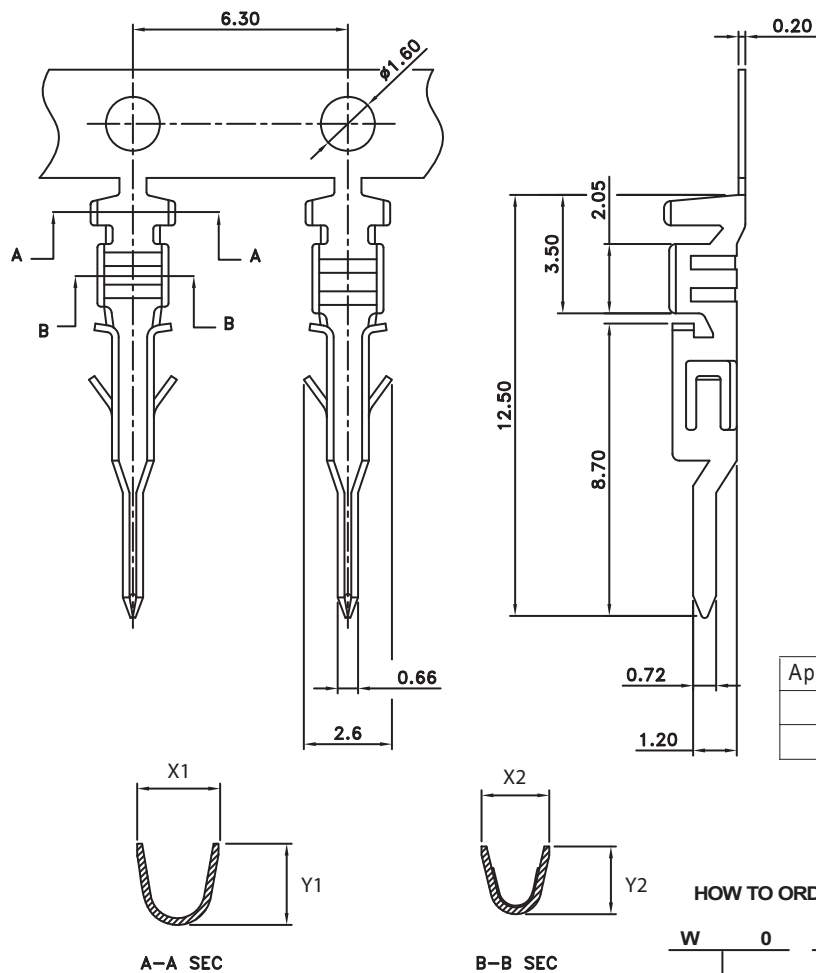

Applicable Wire Size	Tin Plated	Gold Plated	Dim.X1	Dim.Y1	Dim.X2	Dim.Y2
20 - 24 AWG	W071-0020-1A16-Z	W071-0020-1A26-Z	2.70	2.40	2.10	2.10
26 - 30 AWG	W071-0020-1B16-Z	W071-0020-1B26-Z	2.40	1.90	1.80	1.50

HOW TO ORDER:

W 0 7 1 - 0 0 3 0 - 1 X X 6 - Z
 SERIES:

PLATING

1 - Tin Plated Contacts
 2 - Gold Flash Plated Contacts

MOUNTING METHOD

A - CONTACTS (#20 - #24 AWG)
 B - CONTACTS (#26 - #30 AWG)

RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
 INSULATOR RESISTANCE: 1000 Megohm Min.
 OPERATING TEMPERATURE: -40° C TO +105° C

MATERIAL :

MATERIAL: Phosphor Bronze

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Contact Pin for 3.00mm Pitch Series Housings
0	B.S.	S.M.	S.M.	11/14/12	
TOL. DEC. .X +/- 0.30 .XX +/- 0.20 .XXX +/- 0.10 ANGLE +/- 1° UNIT: mm / in					SERIES: W 071-0030-1XX6-Z