
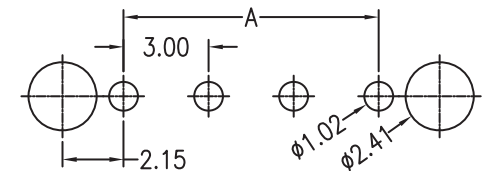
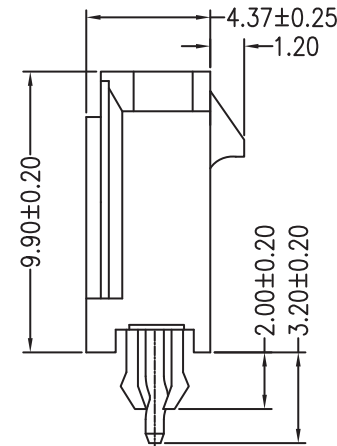


DIMENSION(mm)

CONTACTS	A	B
2	N/A	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

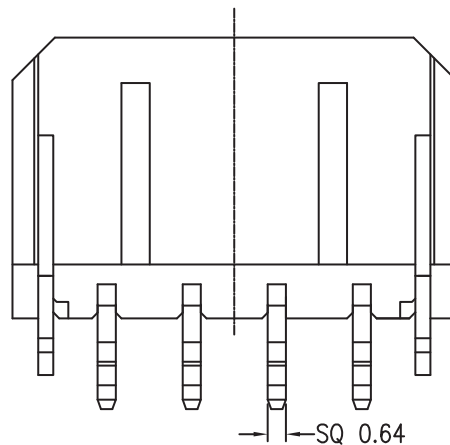

RECOMMENDED PCB LAYOUT

HOW TO ORDER:

SERIES:
W 0 7 1 - X X

NUMBER OF CONTACTS:
0 8 - 1 1

ORIENTATION
8 - STRAIGHT
SINGLE ROW
THRU HOLE

PLATING:
1 - TIN PLATE
2 - AU FLASH
3 - 15 u"AU (SELECT)

RoHS COMPLIANT

PACKAGING OPTION:
1 - TUBE
2 - TRAY

ELECTRICAL :

CURRENT RATING: 5.0 AMPS
VOLTAGE RATING: 250 VAC
CONTACT RESISTANCE: 10 miliohm Max.
DIELECTRIC WITHSTANDING VOLTAGE: 1000 AC / Minute
INSULATOR RESISTANCE: 1000 Megohm Min.
OPERATING TEMPERATURE: -25° C TO +85° C

MATERIAL :

HOUSING: LCP +(30 % Glass Filled)UL 94V-0, Black
CONTACT: Copper Alloy
CONTACT PLATING: Specified Gold or Tin Over Nickel Plating

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	10/31/12	
					Power Connector; 3.00 mm Pitch; Vertical; Thru Hole;
					Metal Snap Mounting Clip
TOL. DEC. .X +/- 0.25 .XX +/- 0.15 .XXX +/- 0.05 ANGLE +/- 3° UNIT: mm / in					SERIES: W 071-XX08-11XX-Z Pg: 1