

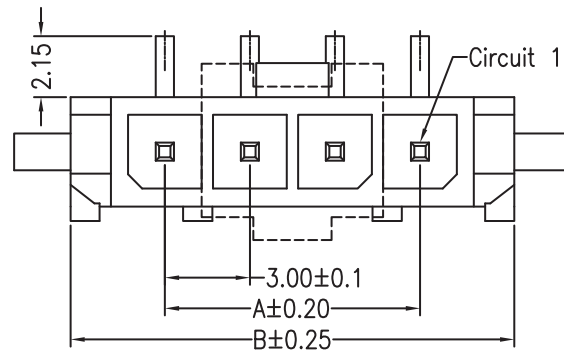


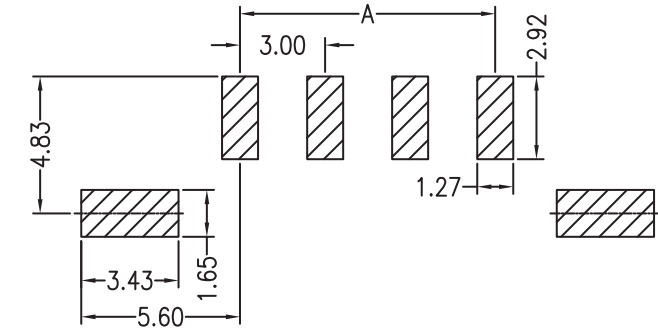


DIMENSION(mm)

CONTACTS	A	B
2	N/A	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

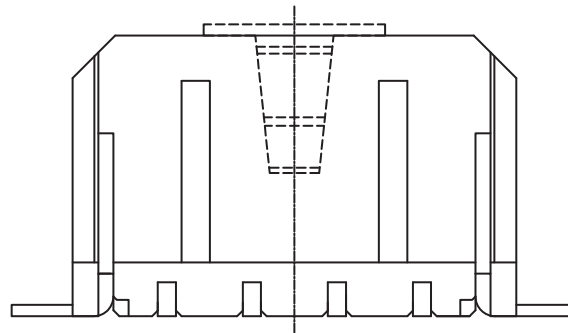

RECOMMENDED PCB LAYOUT

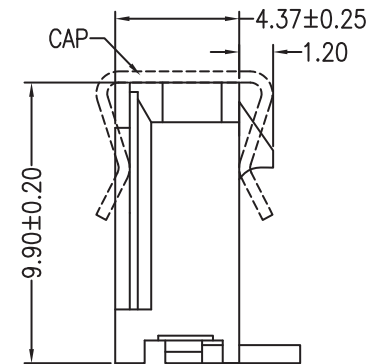

HOW TO ORDER:

W 0 7 1 - X X
SERIES:

NUMBER OF CONTACTS:
 02 Thru 24

ORIENTATION
 9 - STRAIGHT
 SINGLE ROW SMT

PLATING:
 1 - TIN PLATE
 2 - AU FLASH
 3 - 15 u"AU (SELECT)

RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5.0 AMPS
 VOLTAGE RATING: 250 VAC
 CONTACT RESISTANCE: 10 miliohm Max.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 AC / Minute
 INSULATOR RESISTANCE: 1000 Megohm Min.
 OPERATING TEMPERATURE: -25° C TO +85° C

MATERIAL :

HOUSING: LCP +(30 % Glass Filled)UL 94V-0, Black
 CONTACT: Copper Alloy
 CONTACT PLATING: Specified Gold or Tin Over Nickel Plating

PACKAGING OPTION:
 1 - TUBE
 2 - TUBE w/ CAP
 4 - TAPE & REEL w/ CAP

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	11/07/12	
Power Connector; 3.00 mm Pitch; Vertical; Surface Mount,					
With Surface Mount Mounting Tab					
TOL. DEC.	.X +/- 0.25	.XX +/- 0.15	.XXX +/- 0.05	ANGLE +/- 3° UNIT: mm / in	SERIES: W 071-XX09-12XX-Z
					Pg: 1