

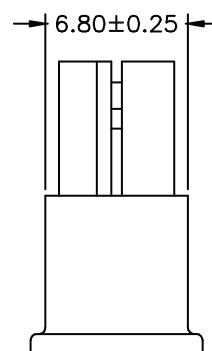



Isometric View

DIMENSION(mm)

CONTACTS	A	B
2	3.00	7.00
3	6.00	10.00
4	9.00	13.00
5	12.00	16.00
6	15.00	19.00
7	18.00	22.00
8	21.00	25.00
9	24.00	28.00
10	27.00	31.00
11	30.00	34.00
12	33.00	37.00

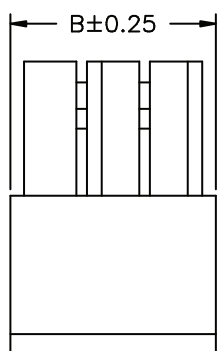

HOW TO ORDER:

W 0 7 1 - X X 1 1 - 1 5 0 0 - Z

SERIES: NUMBER OF CONTACTS: 02 Thru 24 RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
INSULATION RESESTANCE: 1000 Megohm Min.
TEMPERATURE RANGE: -40° C TO +105° C

MATERIAL :

MATERIAL: Nylon 66 UL 94V-0

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Housing For Contats; W071 Series, Single Row; Free Hanging
0 Issued	B.S.	S.M.	S.M.	11/14/12	
TOL. DEC.	.X +/- 0.25	.XX +/- 0.15	.XXX +/- 0.05	ANGLE +/- 3° UNIT: mm / in	SERIES: W 071-XX11-1500-Z Pg: 1