



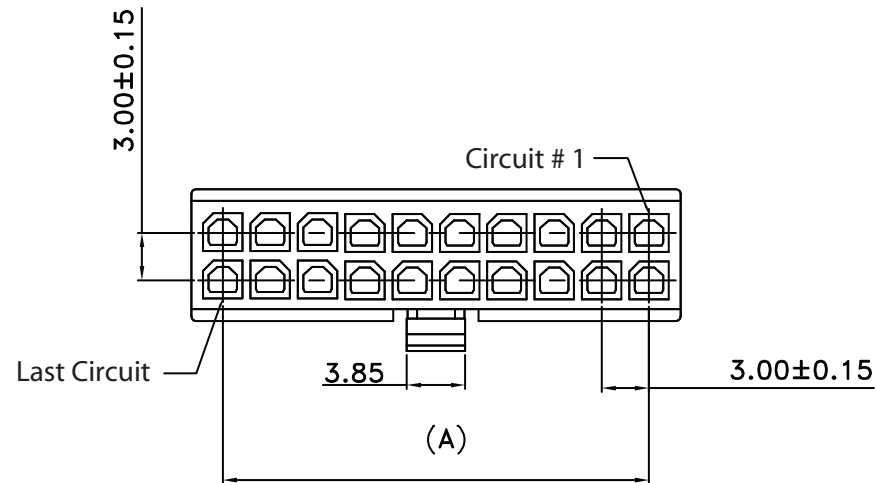

DIMENSION(mm)

CONTACTS	A	B
2	N/A	4.00
4	3.00	7.00
6	6.00	10.00
8	9.00	13.00
10	12.00	16.00
12	15.00	19.00
14	18.00	22.00
16	21.00	25.00
18	24.00	28.00
20	27.00	31.00
22	30.00	34.00
24	33.00	37.00

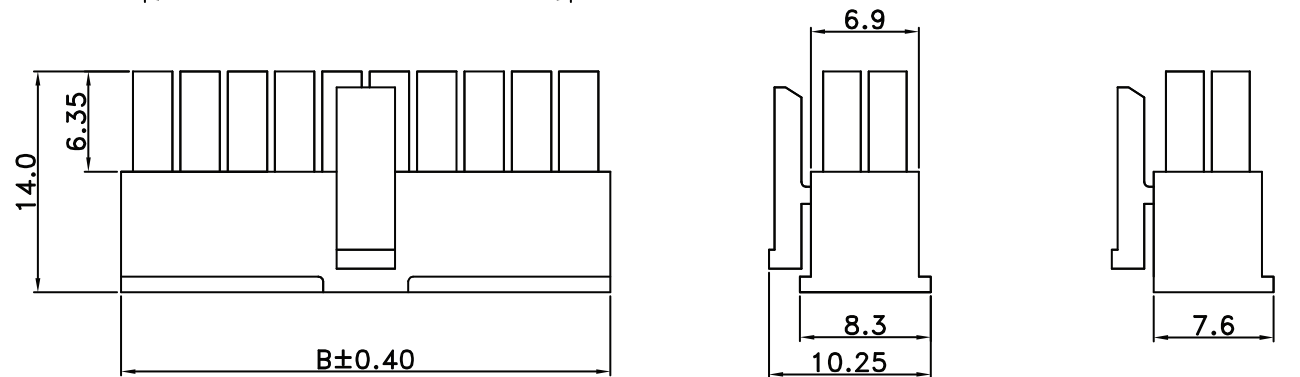

6~24 Circuit

2&4 Circuit

HOW TO ORDER:

W 0 7 1 - X X 1 1 - 1 6 0 0 - Z

SERIES: NUMBER OF CONTACTS: 02 Thru 24 RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
INSULATION RESESTANCE: 1000 Megohm Min.
TEMPERATURE RANGE: -40° C TO +105° C

MATERIAL :

POLES: 2-24 (Double Row)
MATERIAL: Nylon 66 UL 94V-0

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	12/04/12	
						Housing For Power Contacts; W071 Series,
						Double Row; Free Hanging; Double Row
TOL. DEC.	.X +/- 0.30	.XX +/- 0.20	.XXX +/- 0.10	ANGLE +/- 1°	UNIT: mm / in	SERIES: W 071-XX11-1600-Z
						Pg: 1