

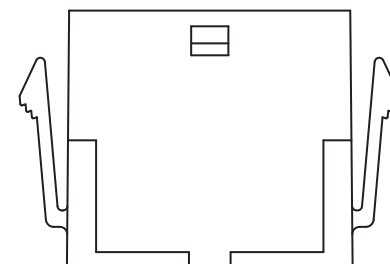
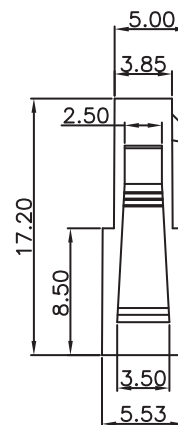


RECOMMENDED PANEL COUTOUT

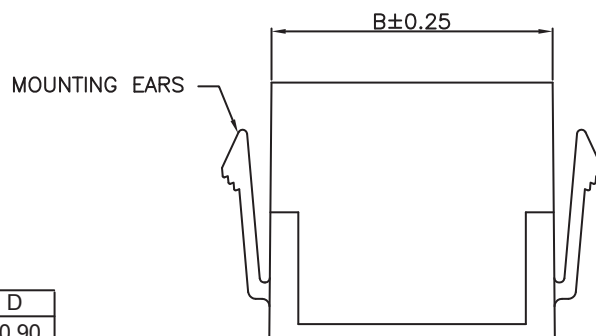

DIMENSION(mm)

CONTACTS	A	B	C	D
2	N/A	6.85	7.20	10.90
3	6.00	9.85	10.20	13.90
4	9.00	12.85	13.20	16.90
5	12.00	15.85	16.20	19.90
6	15.00	18.85	19.20	22.90
7	18.00	21.85	22.20	25.90
8	21.00	24.85	25.20	28.90
9	24.00	27.85	28.20	31.90
10	27.00	30.85	31.20	34.90
11	30.00	33.85	34.20	37.90
12	33.00	36.85	37.20	40.90

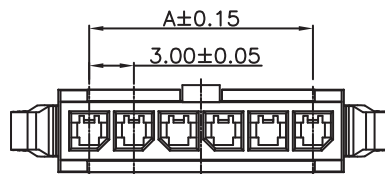

HOW TO ORDER:

W 0 7 1 - X X 1 B - 1 3 0 0 - Z

SERIES: NUMBER OF CONTACTS: RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
INSULATION RESESTANCE: 1000 Megohm Min.
TEMPERATURE RANGE: -40° C TO +105° C

MATERIAL :

MATERIAL: Nylon 66 UL 94V-0

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Housing For Contacts; W071 Series, Single Row; Panel Mount with Ears
0 Issued	B.S.	S.M.	S.M.	11/14/12	
TOL. DEC.	.X +/- 0.25	.XX +/- 0.15	.XXX +/- 0.08	ANGLE +/- 3° UNIT: mm / in	SERIES: W 071-XX1B-1300-Z Pg: 1