

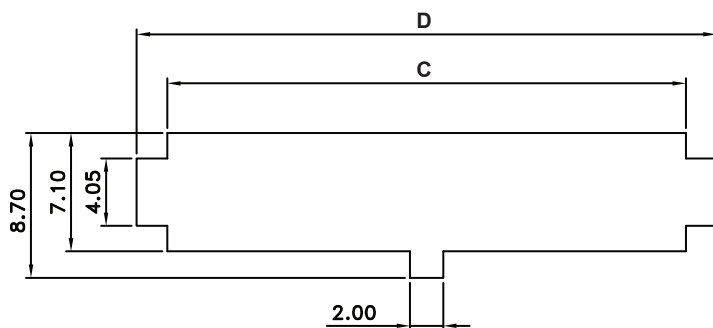
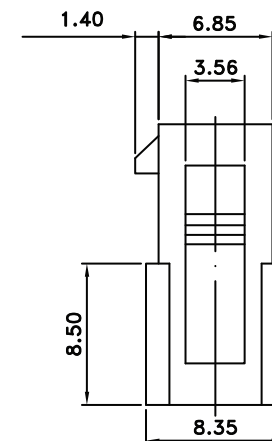


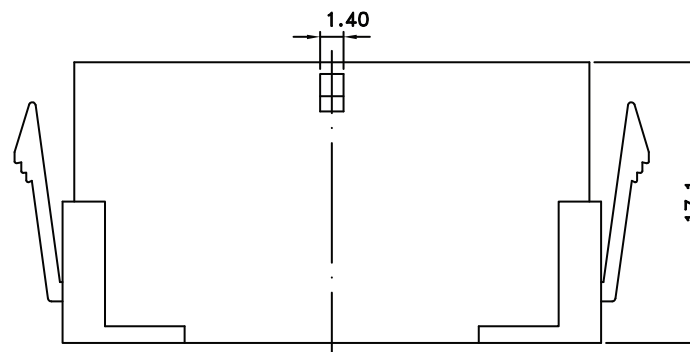

Recommended Panel Cutout

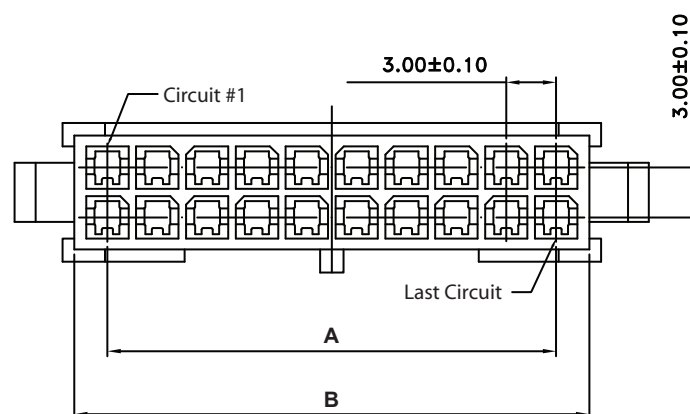

DIMENSION(mm)

CONTACTS	A	B	C	D
2	N/A	4.00	4.21	7.90
4	3.00	7.00	7.21	10.90
6	6.00	10.00	10.21	13.90
8	9.00	13.00	13.21	16.90
10	12.00	16.00	16.21	19.90
12	15.00	19.00	19.21	22.90
14	18.00	22.00	22.20	25.90
16	21.00	25.00	25.20	28.90
18	24.00	28.00	28.20	31.90
20	27.00	31.00	31.22	34.90
22	30.00	34.00	34.22	37.90
24	33.00	37.00	37.22	40.90

HOW TO ORDER:

W 0 7 1 - X X 1 B - 1 4 0 0 - Z

SERIES:

NUMBER OF CONTACTS:
02 Thru 24

RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
INSULATION RESESTANCE: 1000 Megohm Min.
TEMPERATURE RANGE: -40° C TO +105° C

MATERIAL :

POLES: 2-24 (Double Row)
MATERIAL: Nylon 66 UL 94V-0

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	12/04/12		
							Housing For Power Contacts; ; W071 Series,
							Double Row; Panel Mount; With Ears
TOL. DEC.	.X +/- 0.30	.XX +/- 0.20	.XXX +/- 0.10	ANGLE +/- 1°	UNIT: mm / in	SERIES: W 071-XX1B-1400-Z	
						Pg: 1	