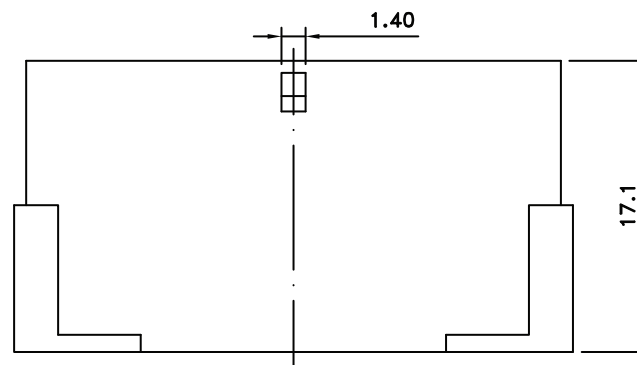
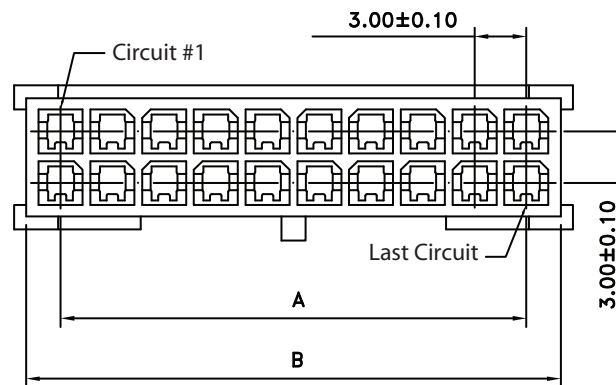
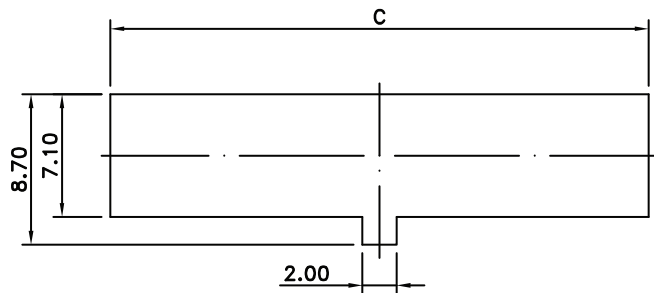


DIMENSION(mm)

CONTACTS	A	B	C
2	N/A	4.00	4.20
4	3.00	7.00	7.20
6	6.00	10.00	10.20
8	9.00	13.00	13.20
10	12.00	16.00	16.20
12	15.00	19.00	19.20
14	18.00	22.00	22.20
16	21.00	25.00	25.20
18	24.00	28.00	28.20
20	27.00	31.00	31.20
22	30.00	34.00	34.20
24	33.00	37.00	37.20

HOW TO ORDER:

W 0 7 1 - X X 1 B - 1 6 0 0 - Z

SERIES: NUMBER OF CONTACTS: 02 Thru 24 RoHS COMPLIANT

ELECTRICAL :

CURRENT RATING: 5A AC/DC
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 AC / Minute
 INSULATION RESESTANCE: 1000 Megohm Min.
 TEMPERATURE RANGE: -40° C TO +105° C

MATERIAL :

POLES: 2-24 (Double Row)
 MATERIAL: Nylon 66 UL 94V-0

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	B.S.	S.M.	S.M.	12/04/12		
							Housing For Power Contacts; ; W071 Series,
							Double Row; Panel Mount; Without Ears
TOL. DEC. .X +/- 0.30 .XX +/- 0.20 .XXX +/- 0.10 ANGLE +/- 1° UNIT: mm / in						SERIES: W 071-XX1B-1600-Z	
						Pg: 1	