

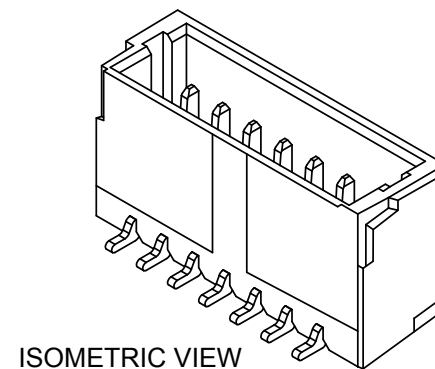

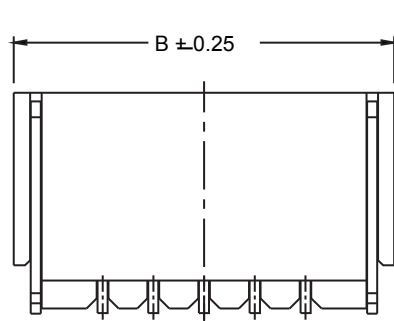


No of Circuits	A	B
2	1.00	4.5
3	2.00	5.5
4	3.00	6.5
5	4.00	7.5
6	5.00	8.5
7	6.00	9.5
8	7.00	10.5
9	8.00	11.5
10	9.00	12.5
11	10.00	13.5
12	11.00	14.5
13	12.00	15.5
14	13.00	16.5
15	14.00	17.5
16	15.00	18.5
17	16.00	19.5
18	17.00	20.5
19	18.00	21.5
20	19.00	22.5

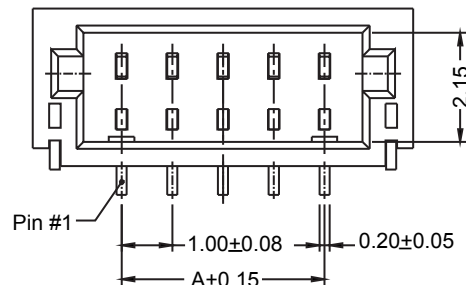

ISOMETRIC VIEW

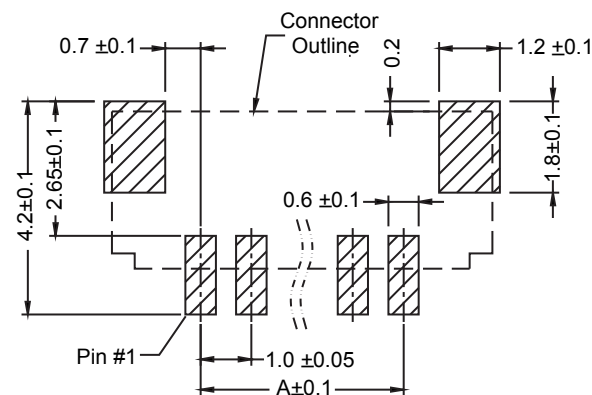

RECOMMENDED PCB LAYOUT

ELECTRICAL:

CURRENT RATING: 1A

VOLTAGE RATING : 50V AC/DC

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC (1min.)

INSULATOR RESISTANCE: >100 Megaohms min.

CONTACT RESISTANCE: 20 Milliohms max.

OPERATING TEMPERATURE: -25°C to +85°C

MATERIAL:

CONTACT: Phosphor Bronze; Tin Plated

SOLDER TABS: Copper Alloy ;Tin Plated

INSULATOR: Nylon 6T UL 94V-0

CAP : Nylon 6T

HOW TO ORDER:

W 1 0 0 - X X 0 2 - 1 3 X - Z
NUMBER OF POSITIONS: 02 Thru 20
CONTACT PLATING
 0 - Full Tin
 1 - Full Gold Flash
RoHS COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. Header, 1.00m Pitch, Vertical;Single Row ;Surface Mount
0	Issued	B.S.	S.M.	06/25/15	
SCALE: N/A					
TOL. DEC.	.X +/- 0.15	.XX +/- 0.10	.XXX +/- 0.005	ANGLE +.45 / -.15	UNIT: in / mm
P/N: W100-XX02-13X-Z					Pg: 1