

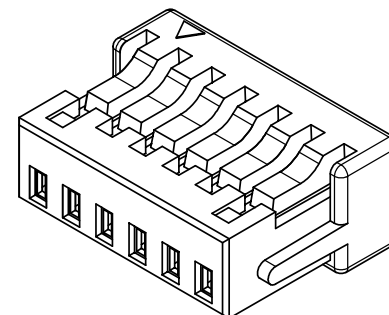
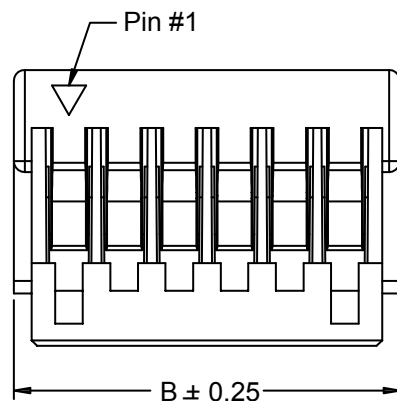


No of Circuits	A	B
2	1.00	3.0
3	2.00	4.0
4	3.00	5.0
5	4.00	6.0
6	5.00	7.0
7	6.00	8.0
8	7.00	9.0
9	8.00	10.0
10	9.00	11.0
11	10.00	12.0
12	11.00	13.0
13	12.00	14.0
14	13.00	15.0
15	14.00	16.0
16	15.00	17.0
17	16.00	18.0
18	17.00	19.0
19	18.00	20.0
20	19.00	21.0

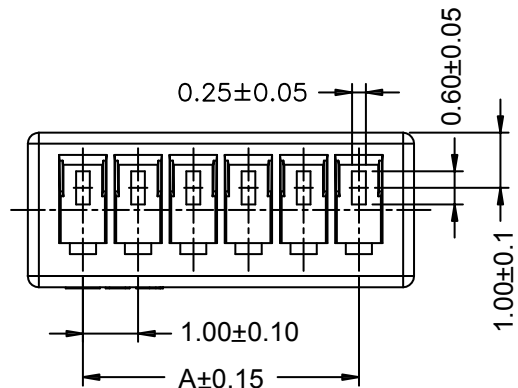

ISOMETRIC VIEW

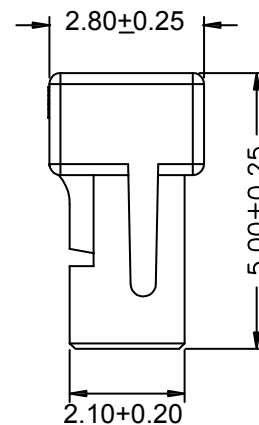

Accepts Contact P/N W100-0010-04X-Z

ELECTRICAL:

CURRENT RATING: 1A

VOLTAGE RATING : 50V AC/DC

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC (1min.)

INSULATOR RESISTANCE: >100 Megaohms min.

CONTACT RESISTANCE: 20 Milliohms max.

OPERATING TEMPERATURE: -25°C to +85°C

MATERIAL:

CONTACT: Phosphor Bronze; Tin Plated

SOLDER TABS: Copper Alloy ;Tin Plated

INSULATOR: Nylon 6T UL 94V-0

HOW TO ORDER:

W 1 0 0 - X X 2 2 - 0 5 0 - Z

NUMBER OF POSITIONS:

02 Thru 20

RoHS
COMPLIANT

Rev	Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.

SCALE: N/A

TOL. DEC. .X +/- 0.15 .XX +/- 0.10 .XXX +/- 0.005 ANGLE +.45 / -.15 UNIT: in / mm

SMP TECHNOLOGY, INC.

Housing, 1.00m Pitch, Straight ;Single Row

P/N: W100-XX22-050-Z

Pg: 1