


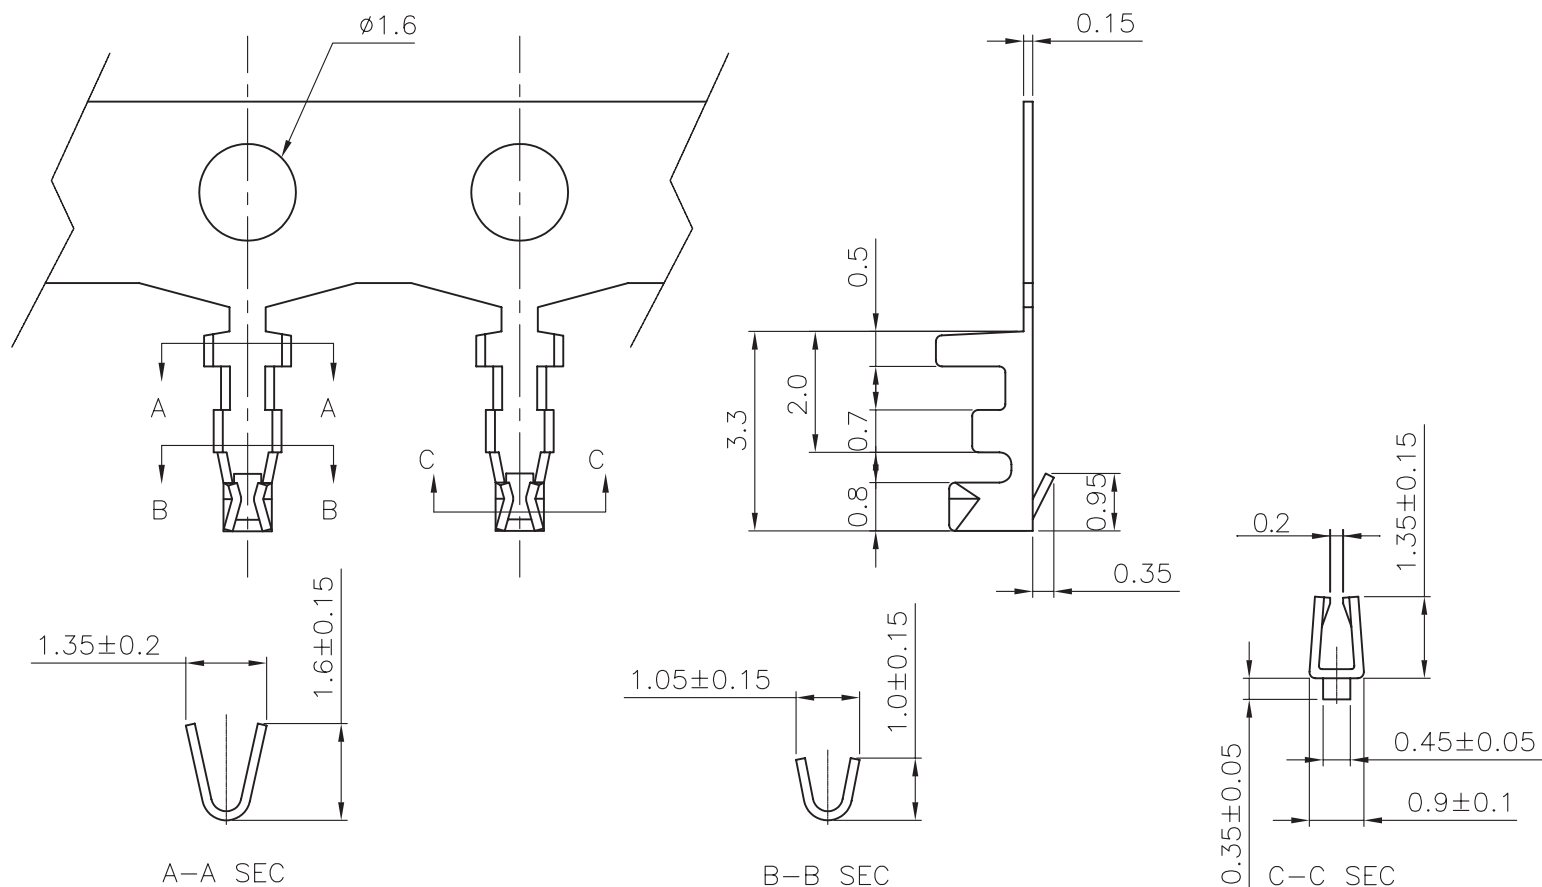

ELECTRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 250V AC/DC

CONTACT RESISTANCE: 20 mΩ max.

DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC for 1 min.

INSULATION RESISTANCE: 100 MΩ Min.

TEMPERATURE RANGE: -40°C to 85°C

TERMINAL:

APPLICABLE WIRES: AWG #28-32

MATERIAL: Phosphor Bronze

FINISH: Tin Plated

THICKNESS: 0.15mm

Q'ty: 15,000 Pcs./Reel

HOW TO ORDER:

W 1 2 5 - 0 0 0 2 - 0 0 1 - Z

OF POSITIONS:
(00 - For Contacts)

HOUSING & TERMINATION TYPE:
0 - CONTACTS

TYPE:
0 - CONTACTS/HOUSING
2 - CONTACTS

OPTIONS:
0 - STD
1 - FOR CONTACTS ONLY
Z - TIN PLATED

RoHS COMPLIANT

Rev		Apv.	Date
0	Issued	A.M.	09/19/03
A	Revised For RoHS Compliance	A.M.	10/15/05

SCALE:n/a				Contacts, Strip Form for Housing	
TOL. DEC.	.X +/- 0.2	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/-	UNIT: mm
P/N:W125-0002-001 -Z					Pg: 1

SMP TECHNOLOGY, INC.