




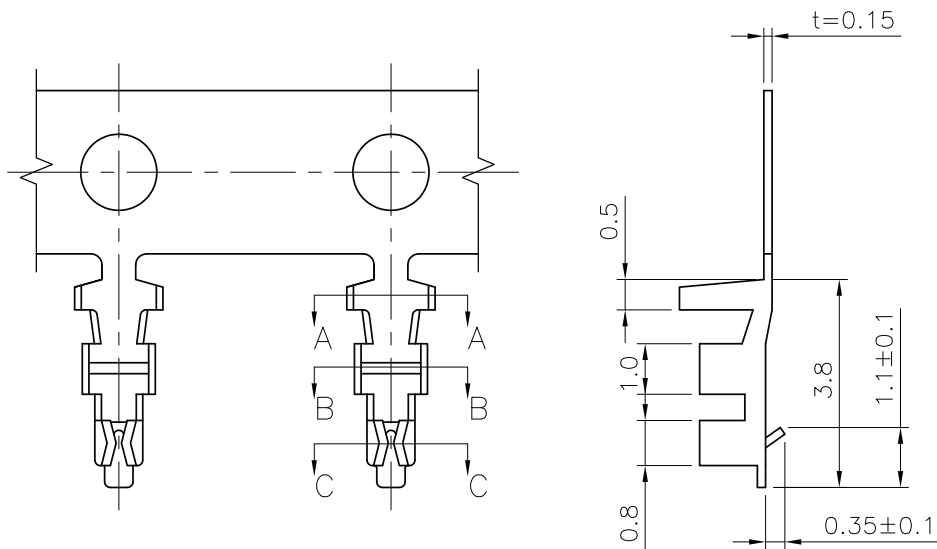


Contact is Used With Housing
P/N: W127-XX21-200-Z



A-A SEC



B-B SEC



C-C SEC

ELECTRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 150V AC/DC

CONTACT RESISTANCE: 30 mΩ max.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC for 1 min.

INSULATION RESISTANCE: 500 MΩ Min.

TEMPERATURE RANGE: -35°C to 85°C

MATERIAL:

CONTACT: Copper Alloy

BASE: Nylon PA46 UL94V-0

FINISH: Tin Plated

PACKAGE & QUANTITY: 15,000 Pcs/ Reel

HOW TO ORDER:

W 1 2 7 - 0 0 0 2 - 0 0 1 - Z

RoHS
COMPLIANT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	4/15/06	
A	Updated for RoHS Compliance	B.S.	S.M.	S.M.	5/30/07	
SCALE:n/a						1.25mm Pitch, Contacts
TOL. DEC.	.X +/- 0.3	.XX +/- 0.2	.XXX +/- 0.1	ANGLE +/-	UNIT: mm	P/N:W127-0002-001-Z Pg: 1