


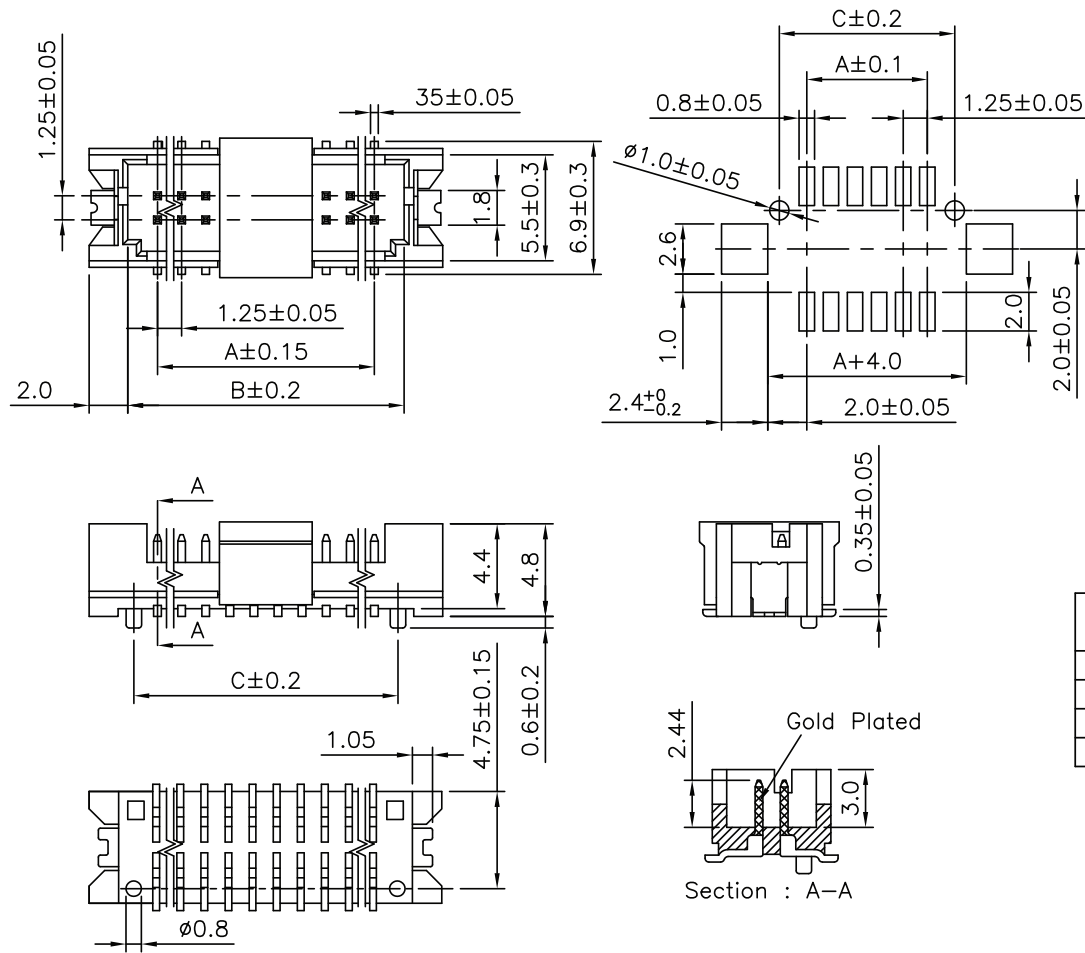

# of Contacts	Dimension(mm)		
	A	B	C
10	5.00	8.09	7.50
20	11.25	14.34	13.75
30	17.50	20.59	20.00
40	23.75	26.84	26.25

ELECTRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 150V AC/DC

CONTACT RESISTANCE: 30 mΩ max.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC for 1 min.

INSULATION RESISTANCE: 500 MΩ Min.

TEMPERATURE RANGE: -35°C to 85°C

MATERIAL:

CONTACT: Copper Alloy

BASE: Nylon PA46 UL94V-0

FINISH: Tin Plated

Q'ty: 900 Pcs./Tape & Reel

HOW TO ORDER:

W 1 2 7 - X X 1 0 - 1 0 1 - Z

OF POSITIONS:

10,20,30,40,

RoHS
COMPLIANT

HOUSING & TERMINATION TYPE:

1 - VERTICAL HEADER SURFACE MOUNT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0 Issued	B.S.	S.M.	S.M.	4/15/06	
A Updated for RoHS Compliance	B.S.	S.M.	S.M.	5/30/07	
SCALE:n/a					1.25mm Pitch, Vertical Header, Surface Mount
TOL. DEC.	.X +/- 0.2	.XX +/- 0.15	.XXX +/- 0.10	ANGLE +/-	UNIT: mm
P/N:W127-XX10-101-Z					Pg: 1