

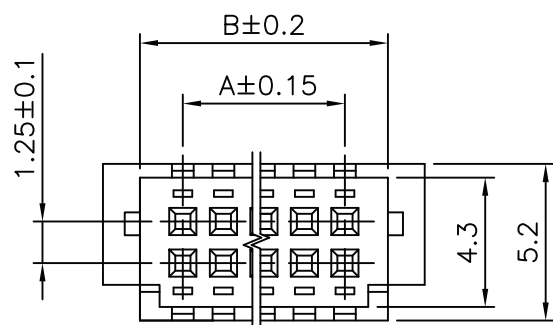




Housing Accepts Contact P/N: W127-0002-001-Z

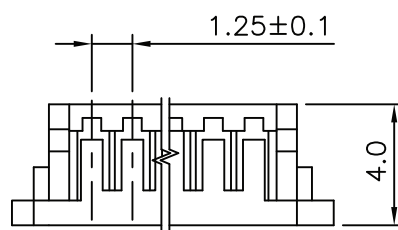

# of Contacts	Dimensions(mm)	
	A	B
10	5.00	8.01
20	11.25	14.26
30	17.50	20.51
40	23.75	26.76

ELECTRICAL:

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 150V AC/DC

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC for 1 min.

INSULATION RESISTANCE: 500 MΩ Min.

TEMPERATURE RANGE: -35°C to 85°C

MATERIAL:

Nylon PA46 UL94V-0

Q'ty: 1,000 Pcs. / Bag

HOW TO ORDER:

W 1 2 7 - X X 2 1 - 2 0 0 - Z

OF POSITIONS:

10,20,30,40

RoHS
COMPLIANT

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	B.S.	S.M.	S.M.	4/15/06	
A	B.S.	S.M.	S.M.	5/30/07	
SCALE:n/a					1.25mm Pitch, Housing
TOL. DEC.	.X +/- 0.3	.XX +/- 0.2	.XXX +/- 0.1	ANGLE +/-	UNIT: mm
P/N:W127-XX21-200-Z					Pg: 1