



Recommended PCB Layout

SPECIFICATIONS

- Voltage Rating : 150V AC/DC
- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : > 100MΩ Min.
- Temperature Range : -25°C to +85°C
- Contact Resistance : < 30 mΩ Max.
- Pin Material: Phosphor Bronze/Tin Plated
- Solder Tabs: Phosphor Bronze/Tin Plated
- Material: Nylon 69, UL94V-0

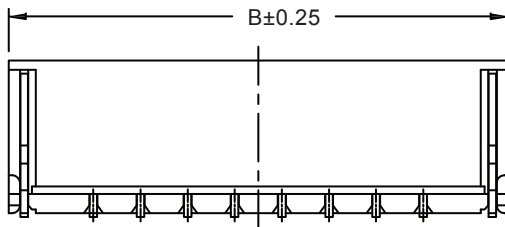

# of Circuits	DIMENSIONS (mm)		
	A	B	C
2	1.25	3.85	5.75
3	2.50	5.10	7.00
4	3.75	6.35	8.25
5	5.00	7.60	9.50
6	6.25	8.85	10.75
7	7.50	10.10	12.00
8	8.75	11.35	13.25
9	10.00	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00

HOW TO ORDER:

W 1 2 8 - X X 1 0 - 3 0 0 - Z

**RoHS
COMPLIANT**

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. 1.25mm Pitch Header, Top Entry P/N : W128-XX10-300-Z
0	B.S.	S.M.	S.M.	03/11/15	
TOL. DEC. .X +/-0.3 .XX +/-0.2 .XXX +/-0.1 ANGLE +/- UNIT: mm					Pg: 1