


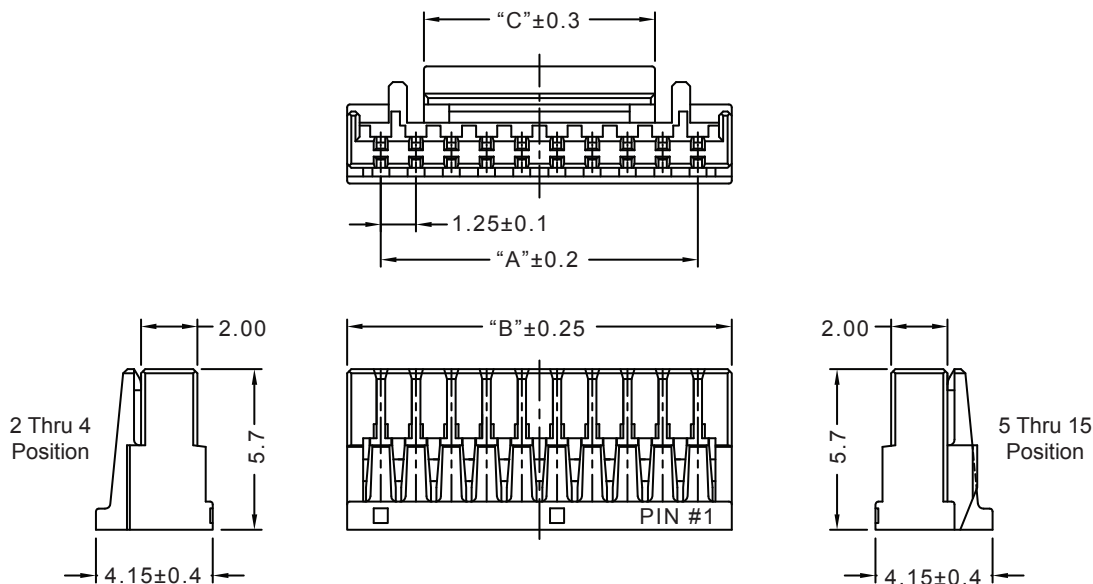

SPECIFICATIONS

- Voltage Rating : 50V AC/DC
- Current Rating : 1A (AWG. #26)
- Withstanding Voltage : 100V AC/minute
- Insulation Resistance : > 100M MΩ
- Temperature Range : -25°C to +85°C
- Contact Resistance : < 30 mΩ

HOW TO ORDER:

W 1 2 8 - X X 2 1 - 0 0 0 - Z

OF POSITIONS:

02 Thru 15

**RoHS
COMPLIANT**

# of Circuits	DIMENSIONS (mm)		
	A	B	C
2	1.25	3.65	1.90
3	2.50	4.90	3.10
4	3.75	6.15	4.25
5	5.00	7.40	6.25
6	6.25	8.65	6.25
7	7.50	9.90	6.25
8	8.75	11.15	6.25
9	10.00	12.40	6.25
10	11.25	13.65	8.20
11	12.50	14.90	8.20
12	13.75	16.15	8.20
13	15.00	17.40	8.20
14	16.25	18.65	8.20
15	17.50	19.90	8.20

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. 1.25mm Housing (Accepts Contact W128-0002-001-Z)
0	B.S.	S.M.	S.M.	03/11/15	
TOL. DEC. .X +/-0.25 .XX +/-0.15 ANGLE +/- UNIT: mm P/N : W128-XX21-000-Z Pg: 1					