
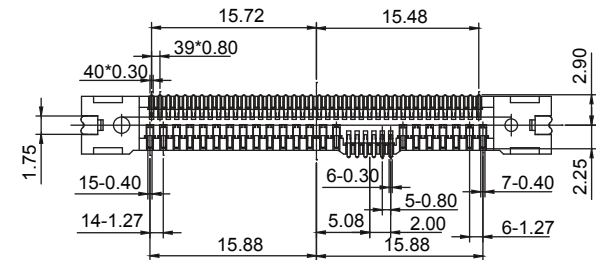
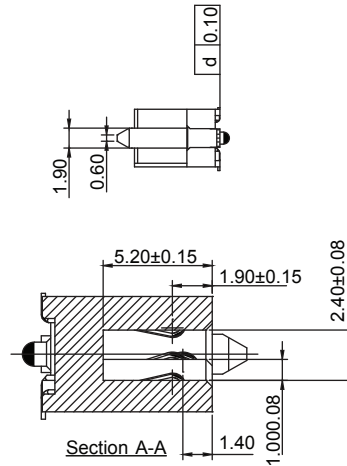


ISOMETRIC VIEW

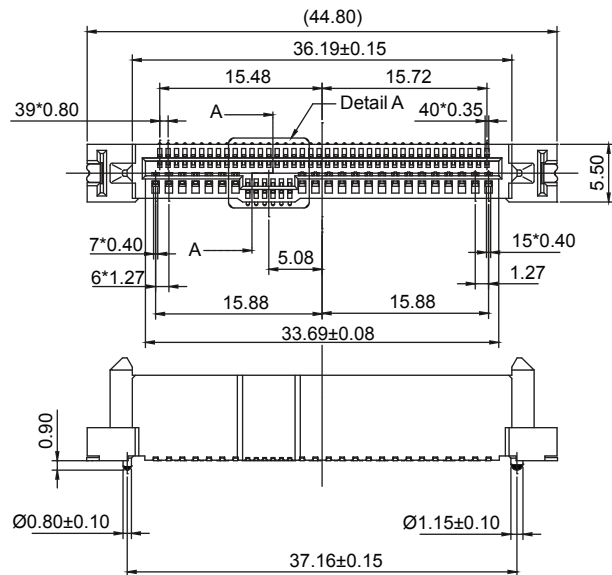

HOW TO ORDER:

W 6 0 0 - 6 8 0 0 - 0 0 0 0 X - Z

NUMBER OF POSITIONS:

68

ORIENTATION

0 - Vertical

PACKAGING:

0 - Tray

SELECTIVE

PLATING

0 - Au Flash




1 - 15u" Au

2 - 30u" Au

RoHS COMPLIANT

Material:
Housing : Thermoplastic UL 94V-0; Black
Contacts: Copper Alloy
Plating : Specified Gold Thickness in Contact Area
Matte Tin Plating on Solder Tails
Nickel Underplated Overall

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	
SCALE: N/A					U.2 Receptacle, SFF8639, 68 Position, SMT, Vertical
TOL. DEC.	.X +/- 0.20	.XX +/- 0.15	.XXX +/-	ANGLE +/- 3° UNIT: mm / in	SERIES: W600-6800-000X-Z

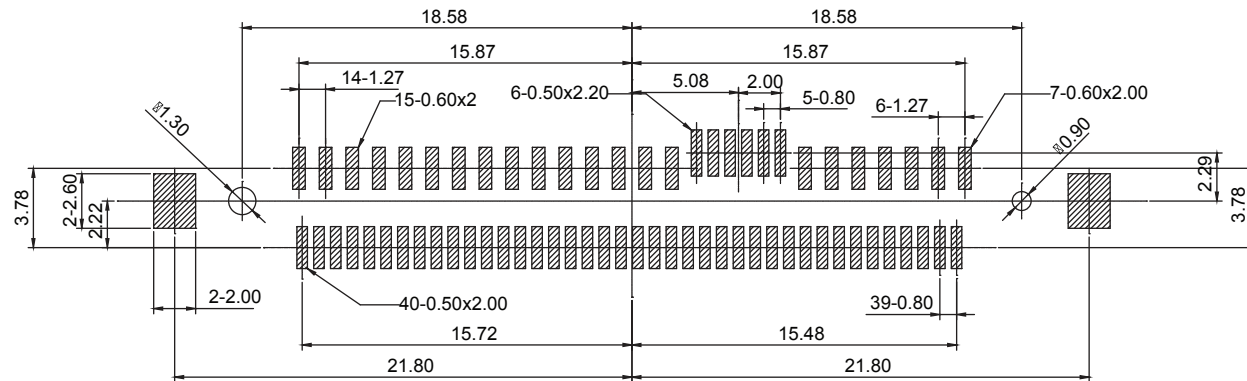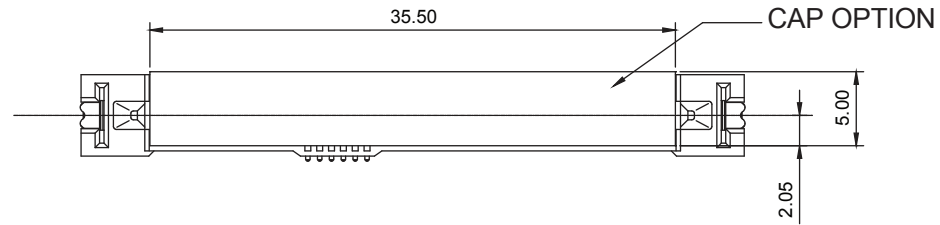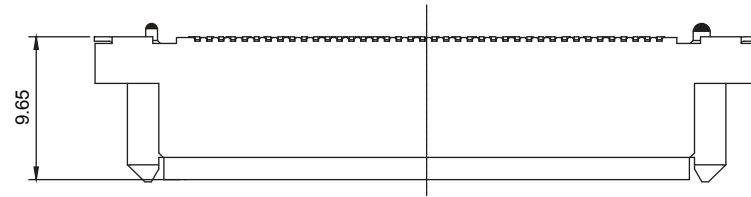

RECOMMENDED PCB LAYOUT

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	B.S.	S.M.	S.M.	02/17/17	
SCALE: N/A						U.2 Receptical, SFF8639, 68 Position Plug, SMT, Vertical
TOL. DEC.	.X +/- 0.20	XX +/- 0.15	.XXX +/-	ANGLE +/- 3°	UNIT: mm / in	SERIES: W600-6800-000X-Z Pg: 2 of 2