

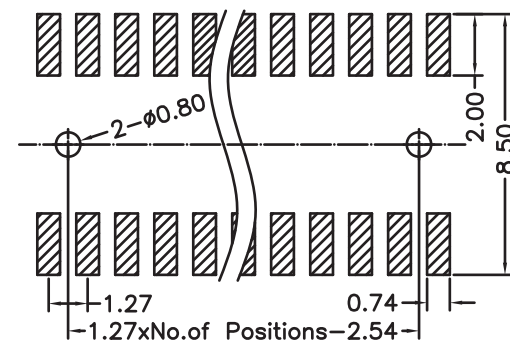


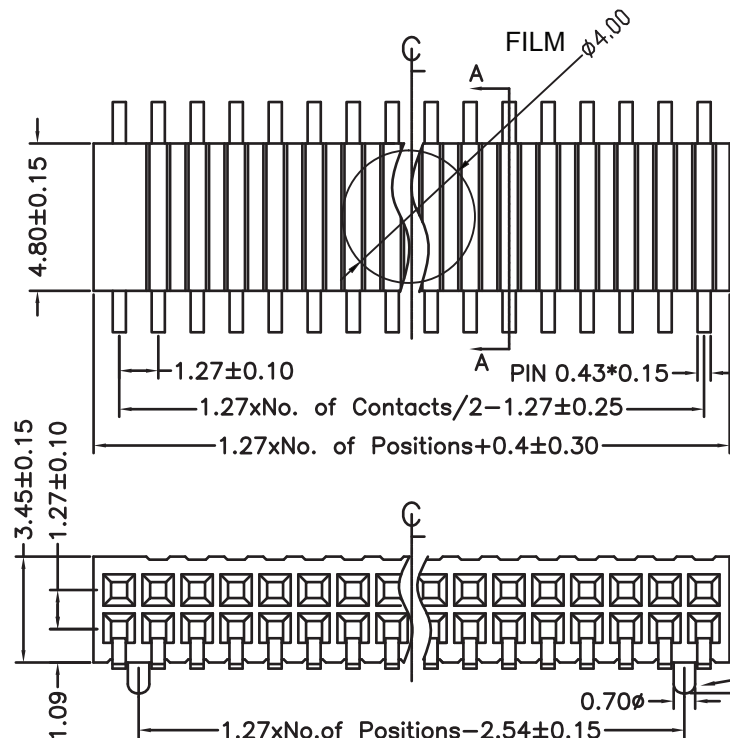


RECCOMENDED P.C.B. LAYOUT

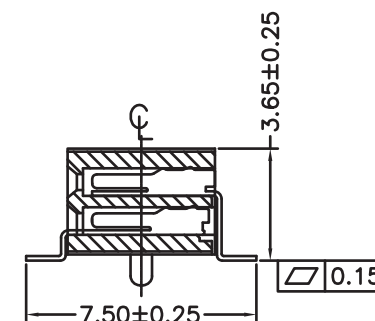

SECTION A - A

HOW TO ORDER:

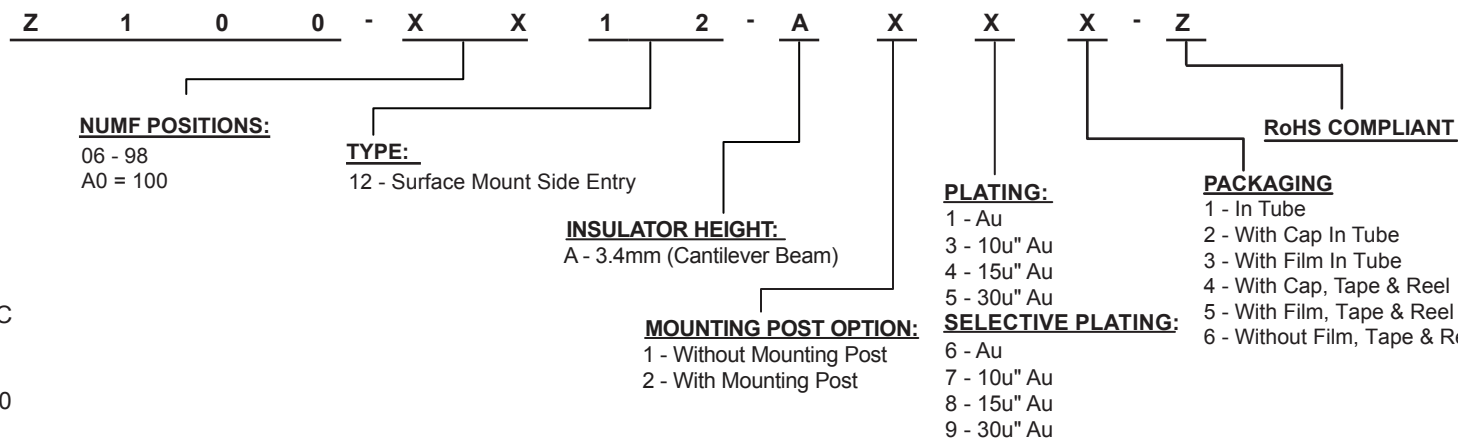

ELECTRICAL:

CURRENT RATING: 1.0 AMP

CONTACT RESISTANCE:

20 Milliohm Max

INSULATION RESISTANCE:

1000 Megaohm Min

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC/DC

OPERATING TEMPERATURE: -40°C to +105°C

MATERIAL:

INSULATOR: PA6T + 30% Glass Filled UL94V-0

CONTACT: Phosphor Bronze

Rev		Drawn	Checked	Approved	Date
0	Issued	B.S.	S.M.	S.M.	02/13/13
A	Added Mounting Post Option	B.S.	S.M.	S.M.	09/22/16

SMP TECHNOLOGY, INC.

Receptacle Assembly, 1.27mm Pitch, Double Row,

Surface Mount Side Entry w/ Mounting Post Option

TOL. DEC. .X +/- 0.4 .XX +/- 0.25 .XXX +/- 0.15 ANGLE +/- 3° UNIT: mm

P/N: Z100-XX12-AXXX-Z

Pg: 1