


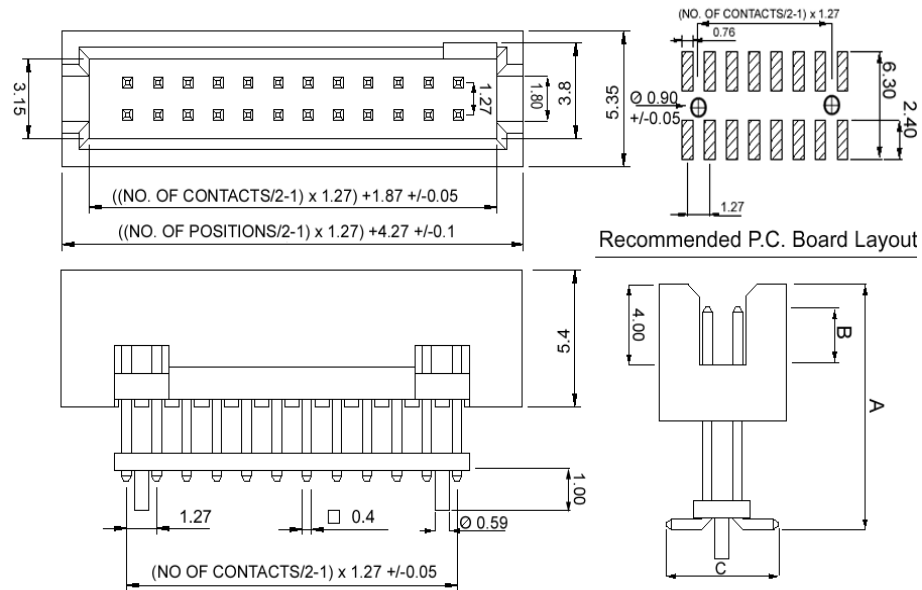

TYPE 02

DIMENSION(mm)

DIMENSION NO.	A	B	C
1	5.50	3.00	1.50

ELECTRICAL:

CURRENT RATING: 1A

CONTACT RESISTANCE: < 30m W

INSULATION RESISTANCE: 5000M W

DIELECTRIC WITHSTANDING VOLTAGE: 600VAC For 1 Min.

OPERATING TEMPERATURE: -55°C to +105°C


MATERIAL:

CONTACT: Copper Alloys

INSULATOR: High Temperature Thermoplastic (UL94V-0)

* MATES WITH Z10 SERIES TYPES 01, 02

HOW TO ORDER:

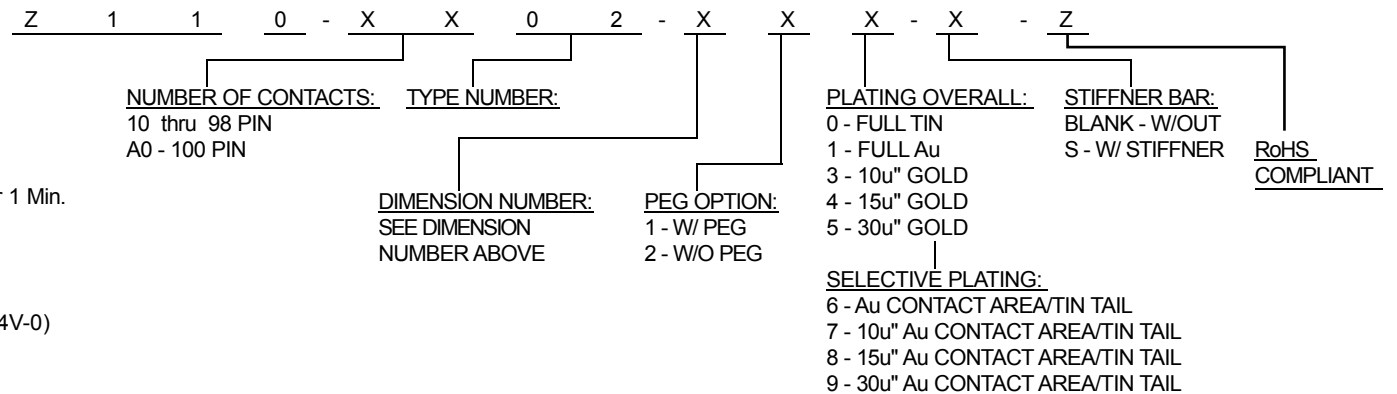

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	S.E.	S.M.	S.M.	4/1/98	
A	B.S.	S.M.	S.M.	7/09/08	
SMT BOX HEADER, 1.27mm Pitch, SINGLE POLARIZATION w/LOW PROFILE					
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm
SERIES: Z11					Pg: 1