


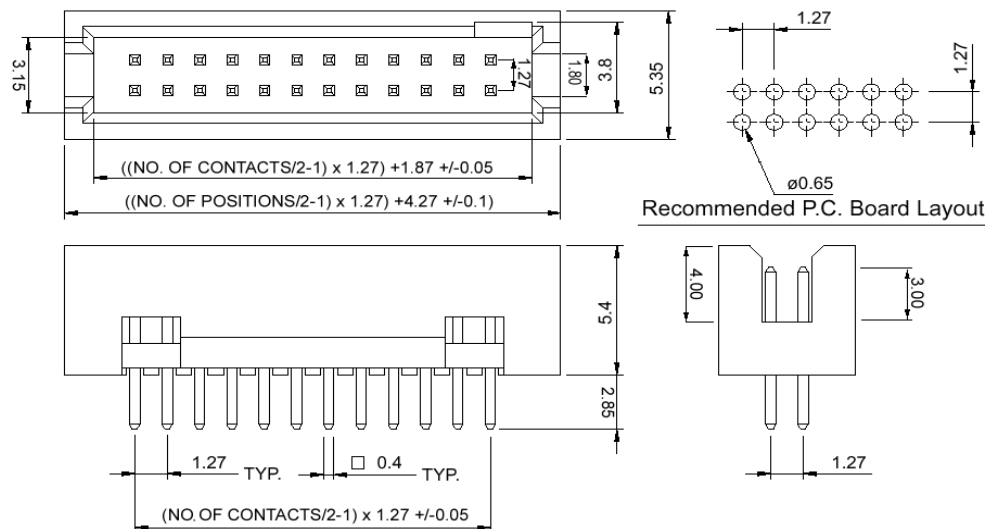

HOW TO ORDER:

Z 1 1

0 - X X

0 3 - 0

0 X - Z

NUMBER OF CONTACTS:
10 thru 98 PIN
A0 - 100 PIN

TYPE NUMBER:
SEE TYPE ABOVE

PLATING OVERALL:
0 - FULL TIN
1 - FULL Au
3 - 10u" GOLD
4 - 15u" GOLD
5 - 30u" GOLD

RoHS
COMPLIANT

SELECTIVE PLATING:
6 - Au CONTACT AREA/TIN TAIL
7 - 10u" Au CONTACT AREA/TIN TAIL
8 - 15u" Au CONTACT AREA/TIN TAIL
9 - 30u" Au CONTACT AREA/TIN TAIL

TYPE 03

ELECTRICAL:

CURRENT RATING: 1A

CONTACT RESISTANCE: < 30m W

INSULATION RESISTANCE: 5000M W

DIELECTRIC WITHSTANDING VOLTAGE: 600VAC For 1 Min.

OPERATING TEMPERATURE: -55°C to +105°C

MATERIAL:

CONTACT: Copper Alloys

INSULATOR: High Temperature Thermoplastic (UL94V-0)

* MATES WITH Z10 SERIES TYPES 01, 02

Rev		Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.	
0	Issued	S.E.	S.M.	S.M.	4/1/98		
A	Revised for RoHS Compliance	B.S.	S.M.	S.M.	7/09/08		
						STRAIGHT (TH) BOX HEADER, 1.27mm Pitch, SINGLE POLARIZATION	
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm	SERIES: Z11	Pg: 1