


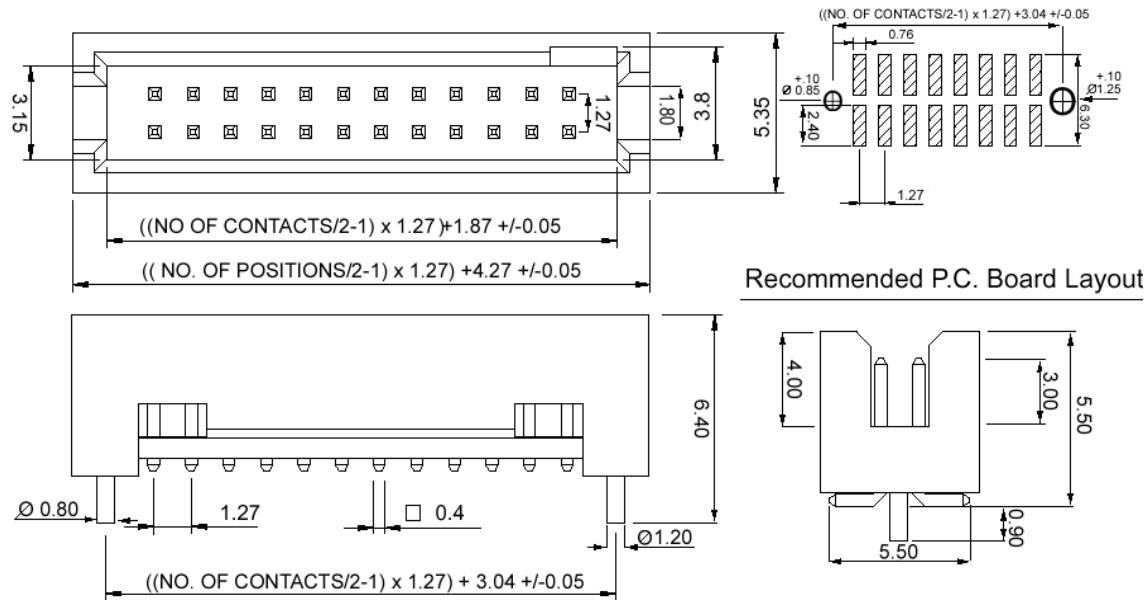

HOW TO ORDER:

TYPE 05

ELECTRICAL:

CURRENT RATING: 1A
CONTACT RESISTANCE: < 30m Ω
INSULATION RESISTANCE: 5000M Ω
DIELECTRIC WITHSTANDING VOLTAGE: 600VAC For 1 Min.
OPERATING TEMPERATURE: -55°C to +105°C

MATERIAL:

CONTACT: Copper Alloys
INSULATOR: High Temperature Thermoplastic (UL94V-0)

* MATES WITH Z10 SERIES TYPES 01, 02

<u>Z</u>	<u>1</u>	<u>1</u>	<u>0</u>	<u>-</u>	<u>X</u>	<u>X</u>	<u>0</u>	<u>5</u>	<u>-</u>	<u>0</u>	<u>X</u>	<u>X</u>	<u>-</u>	<u>Z</u>
					NUMBER OF CONTACTS:		PEG OPTION:		PLATING OVERALL:		RoHS COMPLIANT			
					10 thru 98 PIN		1 - W/ PEG		0 - FULL TIN					
					A0 - 100 PIN		2 - W/O PEG		1 - FULL Au					
									3 - 10u" GOLD					
									4 - 15u" GOLD					
									5 - 30u" GOLD					
									SELECTIVE PLATING:					
									6 - Au CONTACT AREA/TIN TAIL					
									7 - 10u" Au CONTACT AREA/TIN TAIL					
									8 - 15u" Au CONTACT AREA/TIN TAIL					
									9 - 30u" Au CONTACT AREA/TIN TAIL					

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC.
0	Issued	S.E.	S.M.	4/1/98	
A	Revised for RoHS Compliance	B.S.	S.M.	7/09/08	
SMT BOX HEADER, 1.27mm Pitch, SINGLE POLARIZATION					
TOL. DEC.	.X +/- 0.35	.XX +/- 0.25	.XXX +/- 0.15	ANGLE +/-	UNIT: mm
SERIES: Z11					Pg: 1