
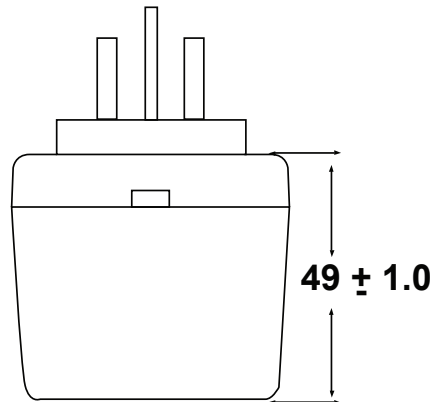
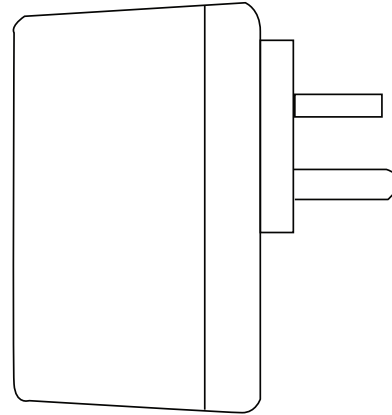


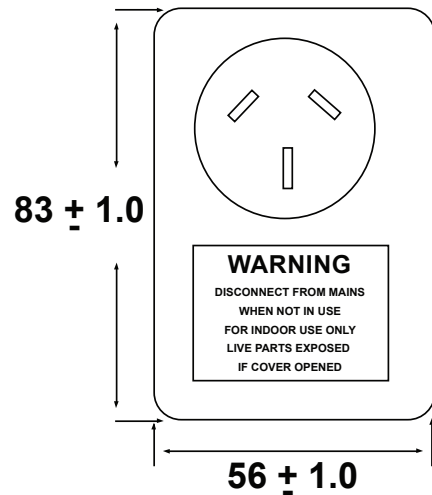

UNIT:mm

MODEL	OUTPUT DC		
	VOLTAGE(V)	CURRENT(mA)	VA
AD-0751000DS	7.5	1000	7.5
AD-0901000DS	9	1000	9
AD-0901200DS	9	1200	10.8
AD-0901500DS	9	1500	13.5
AD-1200500DS	12	500	6
AD-1200600DS	12	600	7.2
AD-1200800DS	12	800	9.6
AD-1201000DS	12	1000	12
AD-1201200DS	12	1200	14.4
AD-1350800DS	13.5	800	10.8
AD-1351000DS	13.5	1000	13.5
AD-1500500DS	15	500	7.5
AD-1500900DS	15	900	13.5
AD-1800500DS	18	500	9
AD-1800600DS	18	600	10.8
AD-1800800DS	18	800	14.4
AD-2400500DS	24	500	12
AD-0900400DSS	24	500	12

FOR OUTPUT PLUG TABLE
SEE PAGE 2

Rev	Drawn	Checked	Approved	Date	SMP TECHNOLOGY, INC. AC/DC ADAPTER, WALLMOUNT, PLUG IN POWER SUPPLY, INPUT: 240VAC 50Hz, SAFETY: SAA AS3260, AS3108 SERIES: EI48-WALLMOUNT-AUSTRALIA-DC OUTPUT Pg: 1
0	B.S.	S.M.	S.M.	09/08/08	
TOL. DEC.	.X +/-	.XX +/-	.XXX +/-	ANGLE +/-	UNIT: mm

STRAIGHT

MALE PLUG
STRAIGHT
(parallel cord)

Part Number	D +/-0.1	L +/-0.5	Wire Gauge
SM1A	ø2.5	11	#22 #24
SM2A	ø3.5	14	#22 #24

MALE PLUG
STRAIGHT
(parallel/
coaxial cord)

Part Number	D +/-0.1	L +/-0.5	Wire Gauge
SM2B	ø3.5	14	#22 #24

FEMALE PLUG
STRAIGHT
(parallel cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
SF2A	ø3.5	ø1.3	7	#22 #24
SF2B	ø3.5	ø1.3	9.5	#22 #24
SF2C	ø3.5	ø1.3	11	#22 #24
SF2D	ø3.5	ø1.3	14	#22 #24
SF3A	ø5.0	ø2.1	9.5	#20
SF3B	ø5.0	ø2.1	11	#20
SF3C	ø5.0	ø2.1	14	#20
SF5C	ø5.5	ø2.5	9.5	#18,#20
SF5B	ø5.5	ø2.5	11	#18,#20
SF5A	ø5.5	ø2.5	14	#18,#20
SF6A	ø6.5	ø3.0	9.5	#20
SF6B	ø6.5	ø3.0	11	#20

FEMALE PLUG
STRAIGHT
(parallel cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
SF3D	ø5.0	ø2.1	9.5	#22 #24
SF3E	ø5.5	ø2.1	11	#22 #24
SF5D	ø5.5	ø2.1	9.5	#22 #24
SF5E	ø5.5	ø2.5	11	#22 #24

FEMALE PLUG
STRAIGHT
(parallel cord
#20,#22,#24
/Coaxial #22)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
SF5F	ø5.5	ø2.1	9.5	#20,#22,#23
SF5G	ø5.5	ø2.1	11	#20,#22,#23
SF5H	ø5.5	ø2.5	9.5	#20,#22,#23
SF5I	ø5.5	ø2.5	11	#20,#22,#23

FEMALE PLUG
STRAIGHT
(SPT-1#18 &
XTW-A #20 Cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
SF5J	ø5.5	ø2.1	12.5	#18,#20

FEMALE PLUG
STRAIGHT
(parallel
/coaxial cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
SF5K	ø5.5	ø2.1	9.5	#22 #24
SF5L	ø5.5	ø2.1	11	#22 #24
SF5M	ø5.5	ø2.1	14	#22 #24
SF5N	ø5.5	ø2.5	11	#22 #24

MINI DIN MALE PLUG, STRAIGHT

Part Number	Pin Configuration
SMD3	
SMD4	
SMD5	
SMS5	
SMD6	
SMD7	

RIGHT ANGLE

FEMALE PLUG
RIGHT ANGLE
(parallel cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
RF4A	ø5.03	ø1.57	8.2	#22 #24
RF4B	ø5.03	ø1.57	13.5	#22 #24
RF3A	ø5.0	ø2.1	9	#22 #24
RF3B	ø5.0	ø2.1	11	#22 #24
RF3C	ø5.0	ø2.5	11	#22 #24
RF5A	ø5.5	ø1.3	11	#22 #24
RF5B	ø5.5	ø2.1	9.5	#22 #24
RF5C	ø5.5	ø2.5	9.5	#22 #24
RF5D	ø5.5	ø2.1	11	#22 #24
RF5E	ø5.5	ø2.5	11	#22 #24

FEMALE PLUG
RIGHT ANGLE
(parallel cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
RF2A	ø3.5	ø1.3	9	#22 #24
RF2B	ø3.5	ø1.3	11	#22 #24
RF5F	ø5.5	ø2.1	9.5	#22 #24
RF5G	ø5.5	ø2.1	11	#22 #24
RF5H	ø5.5	ø2.5	9.5	#22 #24
RF5I	ø5.5	ø2.5	11	#22 #24

FEMALE PLUG
RIGHT ANGLE
(Coaxial cord)

Part Number	D +/-0.1	d +/-0.1	L +/-0.5	Wire Gauge
RF5J	ø5.5	ø2.1	9.5	#22 #24
RF5K	ø5.5	ø2.1	11	#22 #24
RF5L	ø5.5	ø2.5	9.5	#22 #24
RF5M	ø5.5	ø2.5	11	#22 #24

MALE/FEMALE
PLUG
RIGHT ANGLE
(Parallel cord)

Part Number	D +/-0.1	L +/-0.5	Wire Gauge
RM2A	ø3.5	16.5	#22 #24

MINI DIN MALE PLUG, RIGHT ANGLE

Part Number	Pin Configuration
RMD3	
RMD4	
RMD5	
RMS5	
RMD6	
RMD7	

OUTPUT PLUG TABLE

SMP TECHNOLOGY, INC.

Pg: 2